

Mport3104-I

4-port RS485/422 Serial to Ethernet Isolated Server

Product descriptions

Mport3104-I series is a secure terminal server that can be used as a web server. Mport3104-I is designed for serial devices that require centralized monitoring over a network. The security of data transmission becomes more and more important when a large number of serial devices are connected to the network. Mport3104-I can support encryption to ensure the secure and stable networking of serial devices. Mport3104-I serial networking server is a terminal server with one 10/100M Ethernet port and four asynchronous serial ports.



Features:


- One 100M Ethernet RJ45 port and 4 RS422/RS485 serial port
- Using 32-bit Arm Cortex-M7 core CPU, up to nearly 400MHz frequency
- External independent hardware watchdog design to prevent crashes
- Lightning protection of Ethernet interface up to 6KV
- RS-485/RS-422 interface up to 4KV surge protection
- Provide industrial grade DC power supply DC9 ~ 36V input
- Support Modbus RTU/ASCII to Modbus TCP conversion
- Support VirtualCOM software management

Product specifications

Model		Mport3104-I
Power Supply	Operating Voltage	9~36V
	Working Current	104mA@12V
Network Port	Network Port	10/100Mbps;RJ45 interface; adaptive MDI/MDIX cross-connect and auto-flip
	Isolation Protection	1.5KV
Serial Port	Serial Ports	4*RS-485/422
	Baud rate	600~460800 (bps)
	Data bit	7, 8
	Stop bit	1, 2
	validation modes	none, odd parity, even parity
	Isolate Power Supply	3KVDC
Reliability	ESD	±8kV(contact); ±15kV(air)
	Surge	Power Supply: ±4kV/common mode, ±4kV/differential mode
		RS-485/422: ±4kV/common mode, ±4kV/differential mode
		Network port:±6kV/ common mode, ±4kV/ differential mode
EFT	Power supply: ±4kV; Communication port: ± 2kV	
Other	Size(L*W*H)	207×112×34.2 (mm)
	Working Environment	-40°C~+85°C, 5%~95% RH (no condensation)
	Storage Temperature	-40°C~+85°C, 5%~95% RH (no condensation)
Software Parameters	Network protocol	IPv4, IP, TCP/UDP, ARP, ICMP, DHCP, DNS, HTTP, RFC2217
	IP	Static IP / DHCP
	DNS	Support
	User Configuration	Web configuration
	Simple Transparent Transmission Method	TCP Server/TCP Client/UDP Client/UDP Multicast/RealCOM/Pair Connection
	Modbus	Modbus RTU/ASCII to Modbus TCP
	Serial port packaging	Time and length can be set; the default value changes according to the bit rate; the maximum packing length is

	mechanism	1460bytes.
	TCP Server Connection	Support up to 8 TCP connections
	Network Cache	Send: 16Kbyte; Receive: 16Kbyte;
	Serial Buffer	Send: 1.5Kbyte; Receive: 1.5Kbyte;
	Flow Control	Auto Flow Control
	Heartbeat Package	TCP Keepalive
	Registration package	Custom registration package
	RFC2217	Support
	Average Transmission Delay	<10ms
	Supporting Software	Network Configuration Tool, VirtualCOM,MWView, MaxView

Dimensional drawing

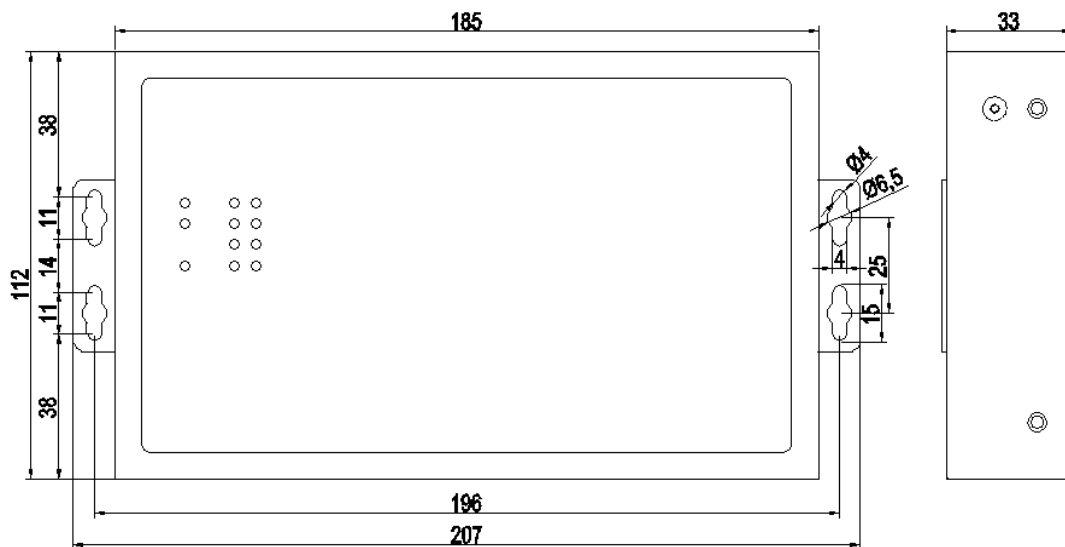

Ordering information

Mport3104-I	4-way RS485/422 terminal blocks to 1x10/100M RJ45 Ethernet, desktop serial to Ethernet server, DC9V~36V power supply, opto-isolation.
-------------	---