

EKI-7720G-4FPI

16GE PoE + 4G SFP Ports Managed Redundant Industrial PoE Switch



Features

- 16 IEEE 802.3af/at PoE ports
- Up to 420W power budget
- SFP socket for easy and flexible fiber expansion
- Redundancy: X-Ring Pro (ultra-high-speed recovery time, <20 ms), RSTP/STP (802.1w/1D)
- IXM function enables fast deployment
- Security: 802.1x (port-based, MD5/TLS/TTLS/PEAP encryption), RADIUS
- Management: SNMP v1/v2c/v3, WEB, Telnet, standard MIB, private MIB
- -40 ~ 70°C wide-range operating temperature
- Dual 48 ~ 57V_{DC} power inputs and 1 x relay output

Introduction

The EKI-7720G-4FPI Gigabit managed PoE switch comes with 16 10/100/1000BaseT(X) ports with 802.3af/at supported and 4 Giga SFP ports. It features 16 IEEE802.3af/at PoE ports, -40~70°C operating temperature, and Din-Rail/Wall-Mount installation options, making it ideal for application which requires high-bandwidth transmission, more PoE ports, and Din-Rail installation.

In addition, it is also embedded with Advantech exclusive features like IXM which benefits users for fast deployment and can dramatically save engineers time and costs, X-Ring Pro which achieves ultra-high speed recovery time of less than 20ms to ensure network stability, and Security Pack which protects your network from internal intrusion.

Specifications

Communication

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3z, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1X, 802.3ad, 802.3ab
- **LAN** 10/100/1000Base-T (X), Optional 100Base-FX, 1000Base-SX/LX/LHX/XD/ZX/EZX
- **Switch Capacity** 40Gbps
- **Transmission Rate** 29.7Mpps

Interface

- **Ethernet Port** 16 x 10/100/1000Base-T(X) RJ45
- **SFP Port** 4 x SFP (mini-GBIC)
- **Console Port** RS232(RJ45)
- **Power Connector** 6-pin screw Terminal Block (including relay)

Physical

- **Enclosure** Metal Shell
- **Protection Class** IP30
- **Installation** Din-Rail, Wall-mount kit
- **Dimension(W x H x D)** 97 x 152 x 105 mm (3.819" x 5.984" x 4.134")

LED Display

- **System LED** SYS, R.M., PWR1, PWR2, Alarm
- **Port LED** Port 1 ~ 16: Link/Activity
Port 17 ~ 20 SFP: Link/Activity
PoE: 1 ~ 16 ports

Environment

- **Operating Temperature** -40~70°C (-40~158°F)
- **Storage Temperature** -40~85°C (-40~185°F)
- **Humidity** 10~95% (non-condensing)

Power

- **Power Input** 48 ~ 57V_{DC} for 802.3af
53 ~ 57V_{DC} for 802.3at
- **System Consumption** 16W
- **PoE Total Power Budget** 420W

Certification

- **Safety** IEC/EN 62368*
- **EMC** CE, FCC Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Vibration** IEC 60068-2-6
- **Free Fall** IEC 60068-2-32


*= Compliant

L2 Feature

- **L2 MAC Address** 8K
- **Jumbo Frame** 9KB
- **VLAN group** 256 (VLAN ID 1~4094)
- **VLAN group** 802.1Q, GVRP, GMRP, 802.1ad VLAN stacking
- **Port Mirroring** Per port, Multi-source port (4 Mirroring sessions Max.)
- **IP Multicast** IGMP snooping v1/v2/v3, MLD snooping(256 Multicast Entries Max.)
- **Storm Control** Broadcast, Multicast, Unknown unicast
- **Redundant Protocol** IEEE 802.1D(STP), IEEE802.1s(MSTP), IEEE802.1w(RSTP), X-Ring Pro, X-Chain, Dual homing, Coupling, ERPS G.8032

Dimensions

Unit: mm [inch]

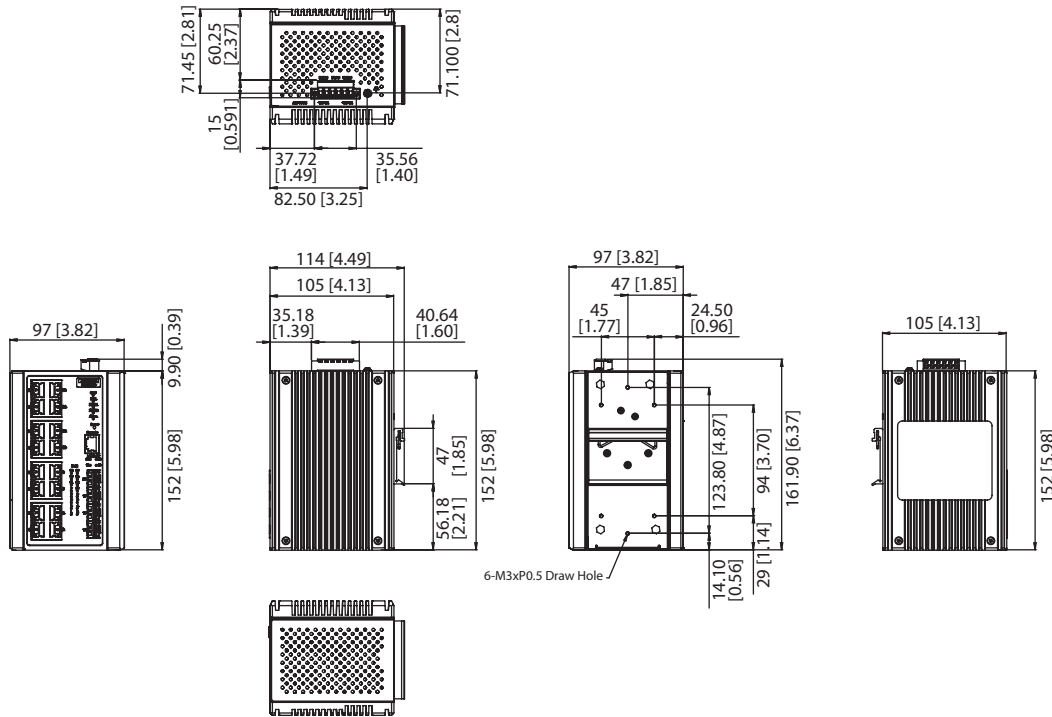

Panel Cut-out Dimensions (W x H x D): 97 x 152 x 105 mm (3.819 x 5.984 x 4.134 inch.)

Quality of Service

- **QoS function** Scheduling(STRICT/WRR), Port Priority, 802.1p, DSCP, IP TOS/ precedence
- **Rate limit** Ingress/ Egress Rate limit
- **Max Priority Queues** 8

Security

- **Port Security** Static MAC, MAC violation notice, port-based loop detection
- **Authentication** 802.1x (Port-based, MAC-based), RADIUS, TACACS+
- **Security Pack** IP source guard, DoS attack prevention, DHCP snooping, ARP spoofing prevention, L2/ L3/ L4 ACL (Access Control List)

Management feature

- **DHCP** Client, Server, Option66/67/82, Port IP-Binding
- **Access** SNMP v1/v2c/v3, WEB, Telnet, Console, RMON, Standard MIB, Private MIB
- **Security Access** SSH (v2), SSL (v2), HTTPs
- **Software upgrade** TFTP, HTTP, Dual Image
- **NTP** NTP server/ client, SNTP
- **Other** IPv4, IPv6, Modbus TCP, IXM, N-Key for config file backup/ restore

Ordering Information

- **EKI-7720G-4FPI-AE** 16GE PoE + 4G SFP Manged PoE Switch w/Wide Temp.

Note: For SFP copper type, only 1000Mbps supported.