

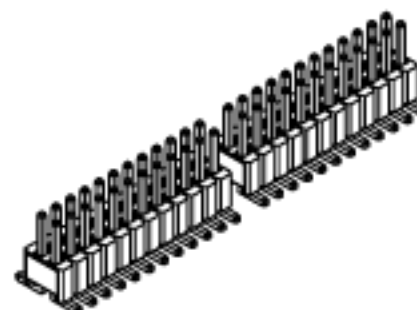
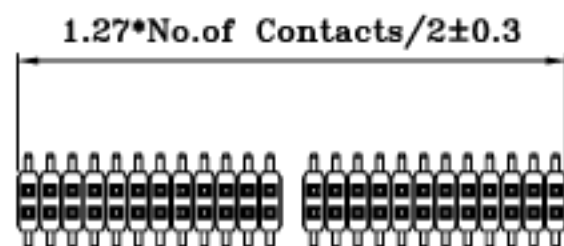


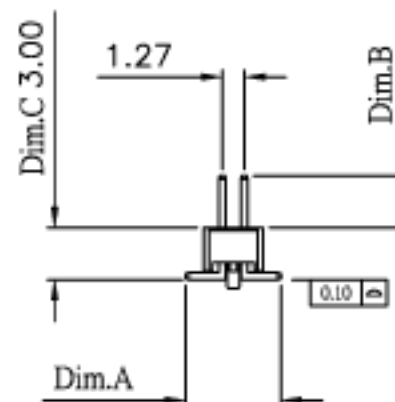


Current Rating:	1 Amps
Insulator Resistance:	5000 Megohms min
Contact Resistance:	20 m ohms max
Operating Temperature:	- 40° ~ +105° C
Max Processing Temp:	230° C for 60 seconds
Max Processing Temp:	260° C for 10 seconds
Contact Material:	Phosphor Bronze
Insulator Material:	Polyester, UL 94V-0
	Standard: Nylon-6T

Finish: Tin, Gold Plated
Standard: Gold Flash all over

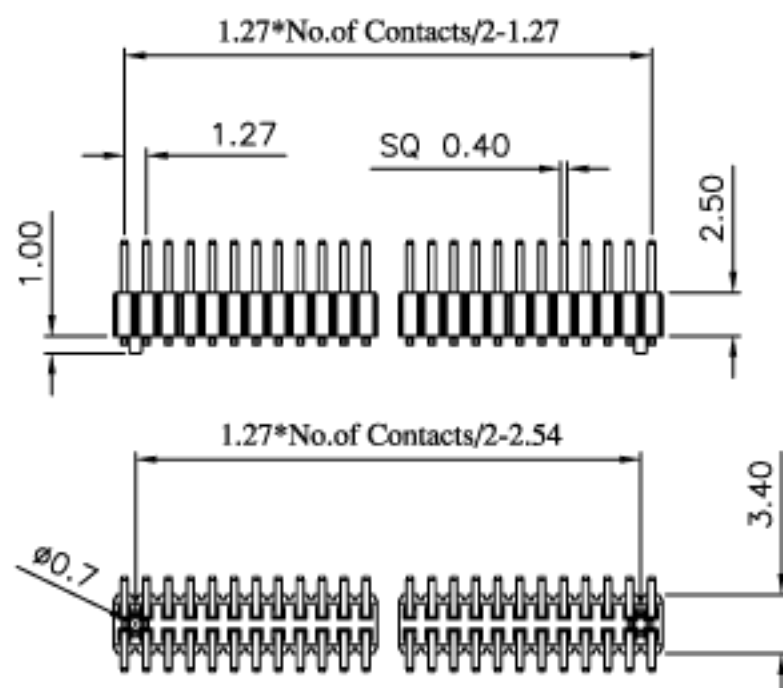

Recommended P.C. Board
SMD Layout

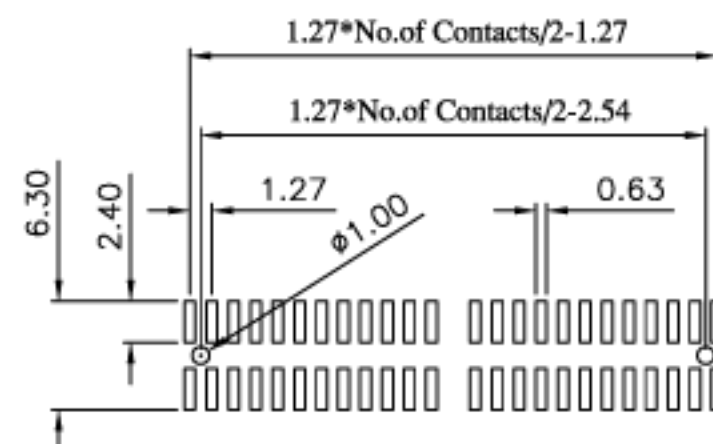

Part No.	Dim.A ±0.20	Dim.B ±0.20	Dim.C ±0.20
H3N25X-2XXD1BKX001B	5.50mm	3.00mm	3.00mm
H3N25X-2XXD1BKX002B	5.50mm	1.80mm	3.00mm

①: H3N25-2XXD1BKX000-2007/02/27-C



CONN TOP
COMPONENT INC.

PART NO	H3N25X-2XXD1BKX000B	.X ±0.3	.XX ±0.20	.XXX ±0.100
DRAWING NO	PHB-00062	EDITION: C1	ITEM: PHB	
DRAWN BY	GARY	2009/02/11	SCALE: 1:1	
APPROVAL BY			UNIT: m.m	

BOM	1: H3N25-2XXBKH0
	2: QT-0.40X XXBN
	3: 0
TEL: (02)86481727	FAX: (02)86482427

(RoHS Compliant)

H3 N 25 X - 1 XX D1 BK X 000 B
1 2 3 4 5 6 7 8

- | | | | |
|---------------------------------------|--|---|------------------------|
| 1. Insulator Material:
N= Nylon-6T | 4. Tail Style:
D1=SMD With Peg Type | 6. Contact Plated:
C=Gold Flash
A=Gold 3u"
D=Gold 5u"
G=Gold 10u"
L=Gold 15u"
U=Gold 30u" | 7. Special Options |
| 2. P= Phosphor Bronze
Blank=Brass | 5. Color: BK=Black
WH=White | | 8. Packing:
B= Tube |
| 3. Per Row 02~50 pin | | | |