


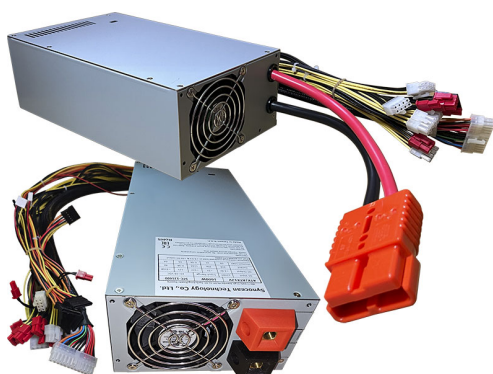

±12V DC Input Industrial PC ATX 2.01 & 2.03 Switching Mode Power Supply

Series	Model No.	Output Watts	Input Voltage	Input Voltage range	Polarity reverse protection
12	STC-121600	1600 W continuous	±12V DC	±10V ~ ±18V DC	Not Protected
12	STC-121300	1300 W continuous	±12V DC	±10V ~ ±18V DC	Not Protected

* H version (Black color chassis)

ENVIRONMENTAL CONDITIONS:

- ▶ Cooling: Forced Air-cooling, 80x80x25 mm Fan x 1 pc
- ▶ Fan type: DC type, 2 x Ball Bearing, 6200 rpm, Optional Fan Control Card
- ▶ Fan Noise Level: 55.8 dBA (SUNON fan brand Official Data at 6200 rpm, 65.9 CFM) @ Full Load
- ▶ Fan Noise Level tested: 64.5 dBA @ Distance 1m (SUNON fan brand 6200 rpm, 58 CFM) @ Full Load
- ▶ Fan brand: DELTA, NMB, SUNON, SUNON IP68 (for H version) with the same specification
- ▶ Operating Temp.: 0°C~+50°C Full Load
- ▶ Operating Temp.: / **H version** -30°C~+60°C Full Load
- ▶ Output Power: 100% @ 50°C, 70% @ 60°C, 50% @ 70°C
- ▶ Output Power: / **H version** 100% @ 60°C, 70% @ 65°C, 50% @ 70°C
- ▶ Operating Humidity: 20%~85% RH (Non condensing)
- ▶ Operating Humidity / **H version** 95% RH Non condensing
- ▶ Storage Temperature: -20°C~+80°C
- ▶ Storage Humidity: 10%~90% RH. (Non condensing)
- ▶ Operating Altitude: 10M Below Sea level to 3000M Above Sea level

DC INPUT CHARACTERISTICS:

- ▶ Input connector type 200A/300V UL Approved Gold Plated Brass 2 Pin 12.5mm Screw Terminal
- ▶ Input Current 97.5A/175.5A(**1300W**) 120A/216A(**1600W**) @Full Load High Line & Low Line
- ▶ Inrush Current Less than 200A Cold start @25°C ambient

DC OUTPUT CHARACTERISTICS:

Output Voltage	Regulation			Output Current				Ripple & Noise		
	Load	Line	Cross	1600W		1600W				
				Min	Max	Min	Max			
+5V	±3%	±1%	±5%	1A	35A	1A	35A	50mV		
+12V				0.5A	123A	0.5A	95A	120mV		
+3.3V				0A	22A	0A	22A	50mV		
-12V	±8%			0A	0.3A	0A	0.3A	120mV		
+5VSB	±5%			0A	4A	0A	4A	50mV		
Maximum continuous combined load on +3.3 V & +5V DC output shall not exceed				175		175		Wattage		
Maximum continuous total DC output power shall not exceed				1600		1300				

OVERALL PERFORMANCE:

- ▶ Efficiency: 67% typical @12V DC Full Load
- ▶ Hold up time:
- ▶ Rise time:
- ▶ Power Good Signal: TTL Compatible signal, on delay 100~500ms, off delay 1ms min.
- ▶ Short Circuit Protection (SCP): All output equipped with SCP (shutdown and latch off)
- ▶ Over Power Protection (OPP): Peak power protected to 130%±10% of continuous rated power (shutdown and latch off)
- ▶ Over Voltage Protection (OVP): +3.3V@4.4V, +5V@6V, +12V@15.6V

RELIABILITY:

- ▶ MTBF: >90,000 hours @max. Load, 12V DC & 25°C ambient
- ▶ Safety Standards: Meet IEC60950-1, EN60950-1
- ▶ Safety Approved:
- ▶ EMI Compatibility (EMC): EN55032:2015/AC:2016, CISPR32:2015, EN61000-3-2:2014, EN61000-3-3:2013, EN55024:2010 +A1:2015

ISOLATION:

- ▶ INPUT and OUTPUT are isolated by transformers and optical couplers
- ▶ Dielectric Withstand: INPUT to OUTPUT: 500V DC for 60 seconds
- ▶ Dielectric Withstand: INPUT to FRAME GROUND: 500V DC for 60 seconds
- ▶ Leakage Current: <0.005μA @ 12V DC

Output Device Connector Specific:

- ▶ ATX 24 Pins x 1 Molex 29-01-2240 or equivalent
- ▶ 12V(P4) 4 Pins x 1 Molex 39-01-2040 or equivalent
- ▶ HDD, DVD 4 Pins x 2 Molex 8981-04P or equivalent
- ▶ FDD 4 Pins x 1 AMP 171822-4 or equivalent
- ▶ Serial ATA x 8 Molex 675820000 or equivalent
- ▶ CPU EPS 8 Pins x 3 Molex 39-01-2080 or equivalent
- ▶ PCIe x 8

Standard Output Cable Length:

610 mm / 24 Inches

PCB specific:

- ▶ Layers: 6
- ▶ Copper: 3 Oz each layer
- ▶ Thickness: 1.6mm
- ▶ Material: FR4
- ▶ PCB material origin: Taiwan

Power Chassis Dimension:

320(L) x 150(W) x 86(H) mm / 12.59(L) x 5.9(W) x 3.39(H) Inches

Net Weight:

7.5 kg / 16.53 lbs

Gross Weight:

8.0 kg / 17.63 lbs

Packing Detail

2 PCs/ Carton

G.W. 16 kg / 35.26 lbs

Measurement of Carton

0.0538 m³ / 1.9 Cuft