

WMP-226V

21.5" -Wide Screen Core i High Performance Medical Panel PC



Key Features

- 21.5" Intel Core i7/i5/i3 Medical Panel PC
- 21.5" FHD 1920x1080 LED Panel
- Intel 3rd gen. IVY bridge Core i7/i5 CPU
- Front flat resistive touch screen
- Medical UL60601-1 3rd edition certification
- Anti-bacteria (MRSA) plastic housing
- Optional PCI/PCIe expansion slot
- Seamless in front & ultra slim 65mm only
- Easy wipe surface with no internal corner
- IP65 at front side, IPx1 for whole system
- Friendly design of Function hot-deys
- Optional 4KV LAN/COM/USB isolation I/O
- Optional built-in battery pack
- Optional P-CAP (4-fingers) touch

Main System

CPU	rPGA988B 3rd Generation Intel® Core i7/i5/i3 processor (35W max.)
Chipset	Intel® BD82HM65 PCH
Graphics	Intel HD Graphics HD 4000
Memory	Two 1066/1333/1600 MHz DDR3 SODIMM socket support dual Channel, non-ECC, up to 16GB
Serial ATA	SATA3 x 2, 600MB/s transfer rate
USB	· External USB 2.0 x 4 (Type A) · Internal 3.3V Socket x 3, 5V Pin Head x 2
COM	x 6 (RS232,422,485 x 1 /RS232 x 5)
Audio	Realtek ALC262 audio codec, 2+2 watts amplifier
LAN	Marvell 88E8071 Gigabit Ethernet x 2
Speaker	1.5W x 2
WDT	Generates system reset; 256 segments, 0, 1, 2...255 sec/min.
BIOS	· Brand: AMI BIOS · Flash ROM size: 64M bit · Support RTC wakeup /Wake on LAN /Power on after power failure/PnP/ACPI/RTC

LCD Panel

Size	21.5" wide 16:9
Resolution	Full HD 1920 x 1080
Brightness	250 nits
Contrast	1000:1
Color numbers	16.7M (6-bit x 3 + Hi FRC)
Viewing angle	170 (H) / 160 (V)
Response time	5 ms (Typ)
Backlight	LED, 30,000 hours life time

Touch Panel

Technology	5-wire resistive touch (default)	Projected capacitive touch (option)
Type	Front full flat touch panel	Front full flat 4 point touch panel
Transparency	> 78% (at 550 nm wavelength)	90% ± 3%
Hardness	3H	7H
Durability	Knock 35 million times	Knock 100 million times

* OS support (Multi point) Win 7 pro, Win 8, Win 8.1 industrial

Storage & Expansion

HDD	2.5" SATA HDD drive bay x 1 + anti-vibration kit, 320GB / 500GB
Expansion slot	· PCI-E x 16 expansion slot x 1 (60W max, can't co-exist with isolated module) or PCI 2.2 x 1 (by different configuration) · Card size: 68mm (W) x 220mm (D) x 18mm(H) · Mini PCIe x 2 (52 pin card-edge type)

I/O & Control Keys

USB	USB 2.0 x 4
COM	DB-9 x 2 (RS232, RS232/422/485 <w/ auto flow control>)
LAN	RJ-45 x 2, Gigabit
Video-out	DVI-I x 1
Audio	Line-out, Microphone-in (3.5 mm phone-jack)
Power input	DC-in x 1, 7V~32V (7V~28V with battery pack)
Control keys	· Front side, projected capacitive type · Power on/off, Brightness, Audio volume, Backlight on/off, Touch on/off

Power

Power adaptor	External, 100 watts, 90~264V AC in, 12V DC out, medical grade, 1.2m DC cable
Power consumption	54 watts (MAX. loading without adapter)
Internal battery (optional)	· Lithium-Ion, 28Wh, for 20 minutes operating (approx.), 2S2P · Charge time: 2 hours (system off), 3.5 hours (system on)


Mechanical & Environmental

Housing	· Front: Full flat design / Touch (standard), Glass (optional) · Rear: Plastic + I/O cover w/ antibacterial treatment
Color	· Housing: White · Control key icons: Silver Grey (Panton no. Cool grey 8C)
IP rating	IP65 – front side
Cooling	Variable speed smart fan design, < 30 dB (typical)
Mounting	VESA 75 x 75 / 100 x 100 mm
Kensington lock	Yes, x 1 at bottom
Dimension	540 x 375 x 78 mm (W x H x D, w/o stand)
Weight (net)	6.5 Kg (approximate, w/o power adaptor)
Temperature	· Operating – 0°C~40°C · Storage – -20°C~60°C
Humidity	Operating & storage – 10%~90%, non-condensing
Regulatory	UL/cUL 60601-1 version 3, FCC/VCCI class B / EN 60601-1 / EN60601-1-2:2007 / ISO 14971

WMP-226V

21.5" -Wide Core i High Performance Medical Panel PC

Outline Dimension

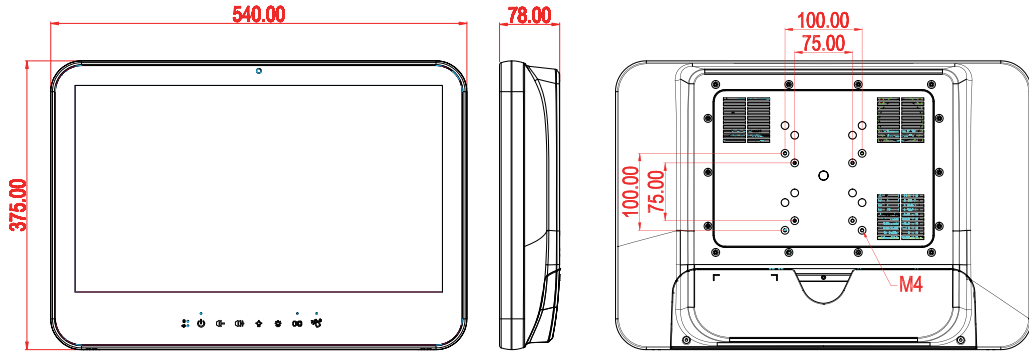

Packaging / Options / Customization

Packaging

System, power adaptor, AC power cord, DVD (drivers & manual)

Options


- WLAN – 802.11 a/b/g/n mini PCIe module with internal antenna x 2
- 802.11a/b/g/n dual-band 2T2R with Bluetooth
- Webcam (3.2M pixel, USB)
- 28W battery pack
- RFID reader (13.56Hz, USB)
- Equipotential terminal pin
- Video Graphic card (PCI-E x 16)
- PCI-E x16 or PCI riser card
- Power adaptor w/ 2.4m or 3.6m DC cable
- Anti-bacteria desktop stand (metal, white)
- Microphone on I/O cover
- Projected capacitive multi-touch
- PoE card
- AG Film

Customization

- Add extra two COM ports
- 4KV Isolation Card x 1
(Isolation COM x 2, Isolation LAN x 1, Isolation USB x 1)
- Tempered glass
- High Speed USB 3.0 x 2
- TPM 1.2 module
- 2D Barcode scanner



I/O Connectors

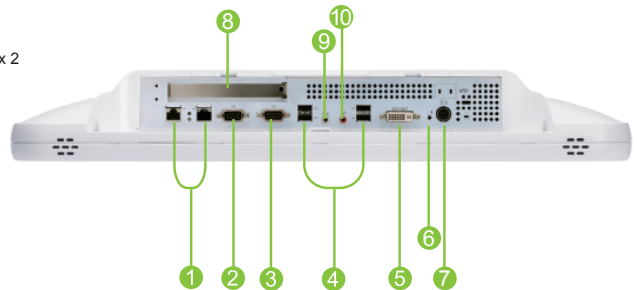

- ① LAN x 2
- ② RS232/422/485
- ③ RS232
- ④ USB x 4
- ⑤ DVI-I
- ⑥ Reset
- ⑦ DC-in
- ⑧ PCI-E/PCI expansion
- ⑨ Line-out
- ⑩ Microphone-in



Ordering Information

- CPU: Core i5 2.5G (default) / Core i7 2.2G / Core i3 2.4G · Memory: 2G / 4G / 8G / 16G · HDD: 320G / 500G
- Power adaptor: 1.2m / 2.4m / 3.6m DC cable · WLAN: None / x 1 · Bluetooth + WLAN: None / x 1 · Battery pack: None / x 1
- RFID reader: None / x 1 · Expansion: None / PCI-E / PCI · Webcam: None / x 1 · Desktop stand: None / x 1 · PoE: None / x 1
- Touch: Projected capacitive multi-touch / 5 wire resistive touch · Video Graphic card: None / x 1
- Equipotential terminal pin: None / x 1 · AG Film: None / x 1 · Microphone on I/O cover: None / x 1

