

MISCOM7208TSN-2GF-6GT

8-port Gigabit Managed DIN-rail TSN Industrial Ethernet Switch



- Support 2 Gigabit SFP ports and 6 Gigabit RJ45 copper ports, providing user with flexible networking methods
- Support TSN time sensitive network series standards (IEEE 802.1AS/Qbv/Qbu/CB/Qci), providing clock synchronization, low latency flow control, and reliability mechanisms
- Support redundancy protocols such as Fast Ring (MW-Ring), ERPSv1/v2, STP/RSTP/MSTP, to improve network reliability
- Support multiple power supply options, with a DC dual power input DC9~60V, which supports dual power redundancy and polarity free connection; AC/DC single power supply input AC85~264V/DC110~370V
- High strength aluminum alloy shell, IP40 protection level, no fan shell heat dissipation, equipment can reliably work in harsh industrial environments ranging from -40 °C to +75 °C





Product Description

MISCOM7208TSN-2GF-6GT series is 8-port fully gigabit Layer 2 managed DIN-rail TSN industrial Ethernet switch, which achieves reliable and deterministic low latency transmission of flows and supports 2 gigabit SFP ports and 6 gigabit copper ports. It has strong bandwidth processing capabilities. It can automatically detect data packet errors, reduces transmission failures, and easily supports 100M networking, ensuring stable, reliable, and efficient data transmission. It uses industrial grade components, combined with high standard system design and production control, 35mm standard DIN-rail installation, high-strength aluminum alloy shell, sturdy and durable. Fanless and efficient heat dissipation, work at a wide temperature range of -40 °C to +75 °C. High standard industrial protection design, adapt to various harsh working environments, and with stable communication performance.

The MISCOM7208TSN-2GF-6GT series switch follows the main communication standards in the industrial field, meets with real-time communication and network security. It provides multiple ways to manage the switch, such as accessing the switch command line (CLI) through the CONSOLE port or TELNET/SSH protocol, accessing the switch web interface through HTTP/HTTPS, and accessing the device MIB through the SNMP protocol. It supports various network protocols and industry standards, such as TSN, PTP, ERPS, MW-Ring, STP/RSTP/MSTP, VLAN, QoS, LACP, IGMP Snooping, LLDP, 802.1X, ACL, RMON, DHCPv4 client/server/listener/relay, NTP, port mirroring, DDM, Ping, Traceroute, etc. It supports system management of uploading and downloading configuration files, upgrading and backing up image files online. In terms of structural installation, DIN-rail mounting or wall mounting are optional. This product is widely applicable in fields of comprehensive energy, smart cities, rail transit, intelligent transportation and industrial automation.



Features and Benefits

- Support link static aggregation and dynamic aggregation LACP, which can increase transmission bandwidth, improve link reliability, and achieve network load sharing
- Support port statistics, count different bytes or types of data frames sent and received, and monitor port traffic
- Support 802.1Q VLAN and provides Access, Trunk, and Hybrid interfaces for easy partitioning of multiple broadcast domains, enhancing network security
- Support VLAN partitioning based on MAC, protocols, IP subnets, streams, and other methods, suitable for networks in different environments
- Support IGMP Snooping and multicast filtering for Layer 2 multicast forwarding or filtering, saving network resources
- Support LLDP link layer discovery protocol, obtains LLDP neighbor device information, monitors link status, facilitates topology management and fault localization
- Support ERPSv1/v2 Ethernet multi ring protection technology, provide multi ring networking, perform link backup, achieve fast convergence, and improve network stability
- Support fast ring network MW-Ring private protocol and STP/RSTP/MSTP spanning tree protocol, which can eliminate network loops and improve network reliability
- Support loop back detection to prevent network storms
- Support various login methods such as HTTP, HTTPS, TELNET, SSH, and CONSOLE ports
- Support SNMPv1/v2c/v3, enabling information queries, modifications, and troubleshooting through the MIB network management system, achieving centralized management
- Support RMON remote network monitoring, perform statistics and alarms on various types of data frames, and can be used for remote monitoring and management of network management systems
- Support port security, convert dynamic MAC addresses into secure dynamic/static/Sticky MAC, enhance device security
- Support 802.1X port authentication, authenticate accessed users, and provide local and radius login authentication
- Support AAA secure network management mechanism, authentication, authorization, and billing through radius and TACACS+ to prevent illegal user login
- Support ACL access control list, customizable filtering rules for multiple frame types, filtering or rate limiting specified packets
- Support IPv4 and IPv6 source defense attacks, bind ports, source IP, source MAC, and VLAN to prevent source IP address spoofing
- Support ARP protection to prevent network interruption or information leakage caused by ARP flooding/spoofing attacks
- Support QoS service quality, prioritize the transmission of voice, video, and important data in network devices, and solve network congestion
- Support port mirroring and can collect data sent and received by ports for network detection and fault management
- Support DDM digital diagnostic monitoring, detecting temperature, voltage, transmitted optical power,

- received optical power of the DDM fiber module
- Support Ping IPv4/IPv6 and Traceroute IPv4/IPv6 to detect network connectivity and locate fault points
- Support DHCPv4 server, centrally manage and configure user IP addresses dynamically
- Support DHCPv4 listening, ensuring that DHCP clients obtain IP addresses from legitimate DHCP servers to prevent DHCP attacks
- Support DHCPv4 relay to assist DHCP servers in dynamically allocating network parameters to DHCP clients
- Support system logging of user operations, system security, system failures, and remote monitoring of Syslog servers
- Support dual power redundancy failure alarm and port disconnection alarm, and Support relay alarm mode

Specification

Software	
Switch Function	<p>Support 802.1Q VLAN, VLAN based on MAC/IP subnet/protocol/stream, VLAN translation, PVLAN</p> <p>Support port configuration, such as port speed, duplex mode, flow control, maximum transmission unit, etc</p> <p>Support port speed limit, storm suppression, storm detection, and port statistics</p> <p>Support port aggregation, static aggregation, dynamic aggregation LACP</p> <p>Support MAC address aging and learning limitations, static MAC address binding</p>
TSN	<p>IEEE 802.1AS (generalized PTP, gPTP)</p> <p>IEEE 802.1Qbu (Frame Preemption, FP)</p> <p>IEEE 802.1Qbv (Time-Aware Shaper, TAS)</p> <p>IEEE 802.1Qci (Per-Stream Filtering and Policing, PSFP)</p> <p>IEEE 802.1CB (Frame Replication and Elimination for Reliability, FRER)</p>
Redundancy	<p>Support fast ring network MW-Ring private protocol</p> <p>Support ERPSv1/v2</p> <p>Support STP/RSTP/MSTP</p> <p>Support loop back detection</p>
Multicast	<p>Support IGMP Snooping</p> <p>Support multicast filtering</p>
Security Management	<p>Support HTTPS, SSH service control, HTTP/HTTPS, SNMP, TELNET/SSH access management</p> <p>Support privilege level and port security</p> <p>Support 802.1X port authentication, AAA authentication, radius, TACACS+protocols</p> <p>Support source IPv4/IPv6 protection and ARP protection</p> <p>Support ACL and filters data from L2-L4 layers</p>

Specification

Management and Maintenance	Support IEEE 1588v2 (Precision Time Protocol, PTP) Support QoS, SP, DWRR queue scheduling Support DHCPv6 clients, DHCPv4 clients/servers/listeners/relays Support SNMPv1/v2c/v3, SNMP Trap v1/v2c/v3, RMON, LLDP, LLDP MED Support port mirroring, DDM, Ping IPv4/IPv6, Traceroute IPv4/IPv6 Support user permission management, logging, NTP client, and daylight saving time Support configuration file upload/download/activation/deletion, dual mirror backup, restart, and factory reset	
Switch Capability		
Processing Type	Store-and-Forward	
Backplane Bandwidth	23Gbps	
Buffer Size	1.25Mbit	
Mac Address Table	8K	
Interface		
Gigabit Fiber Port	2x1000Base-X SFP ports	
Gigabit Copper Port	6x10/100/1000Base-T(X) auto-sensing RJ45 ports, full/half duplex, auto MDI/MDI-X	
Relay	1 relay alarm output, 5.08mm pitch 3-pin terminal block	
CONSOLE	1 CONSOLE port, RS232 signal RJ45 port, used for device debugging and command line configuration	
Button	One-click restart or factory reset	
Status LED	Power LED, operation LED, alarm LED, optical port LED, TSN LED, Ring LED, copper port speed and connection/activity LED	
Power Supply	MISCOM7208TSN-2GF-6GT	MISCOM7208TSN-2GF-6GT-AD220
Input Voltage	DC9~60V, dual power redundancy, non polarity	AC85~264V/DC110~370V
Power Consumption	<12W@DC12V(full load)	<12W@AC220V(full load)
Connection	5.08mm pitch 5-pin terminal block	
Protection	Built-in over-current protection	
Physical Characteristics		
Dimensions	160x58x122(mm)(DIN rail mounting clip excluded)	


Specification

Installations	35mm standard DIN-rail mounting	
IP Code	IP40	
Weight	DC model is about 0.86kg and AC model is about 0.9kg	
Working Environment		
Operating Temp	-40°C~+75°C	
Storage Temp	-40°C~+85°C	
Relative Humidity	5%~95% (non-condensing)	
Industry Standard	MISCOM7208TSN-2GF-6GT	MISCOM7208TSN-2GF-6GT-AD220
EMC	<p>IEC 61000-4-2 (ESD): Level 4</p> <ul style="list-style-type: none"> • Contact discharge $\pm 8kV$ • Air discharge $\pm 15kV$ <p>IEC 61000-4-5 (Surge): Level 4</p> <ul style="list-style-type: none"> • Power supply: common mode $\pm 4kV$, differential mode $\pm 2kV$ • Ethernet port: common mode $\pm 4kV$, differential mode $\pm 2kV$ <p>IEC 61000-4-4(EFT): Level 4</p> <ul style="list-style-type: none"> • Power supply: $\pm 4kV$ • Ethernet port: $\pm 2kV$ 	<p>IEC 61000-4-2 (ESD): Level 4</p> <ul style="list-style-type: none"> • Contact discharge $\pm 8kV$ • Air discharge $\pm 15kV$ <p>IEC 61000-4-5 (Surge): Level 3</p> <ul style="list-style-type: none"> • Power supply: common mode $\pm 2kV$, differential mode $\pm 2kV$ • Ethernet port: common mode $\pm 4kV$, differential mode $\pm 2kV$ <p>IEC 61000-4-4(EFT): Level 4</p> <ul style="list-style-type: none"> • Power supply: $\pm 4kV$ • Ethernet port: $\pm 2kV$
Certification	CE, FCC, RoHS	



Dimensions

Unit: mm

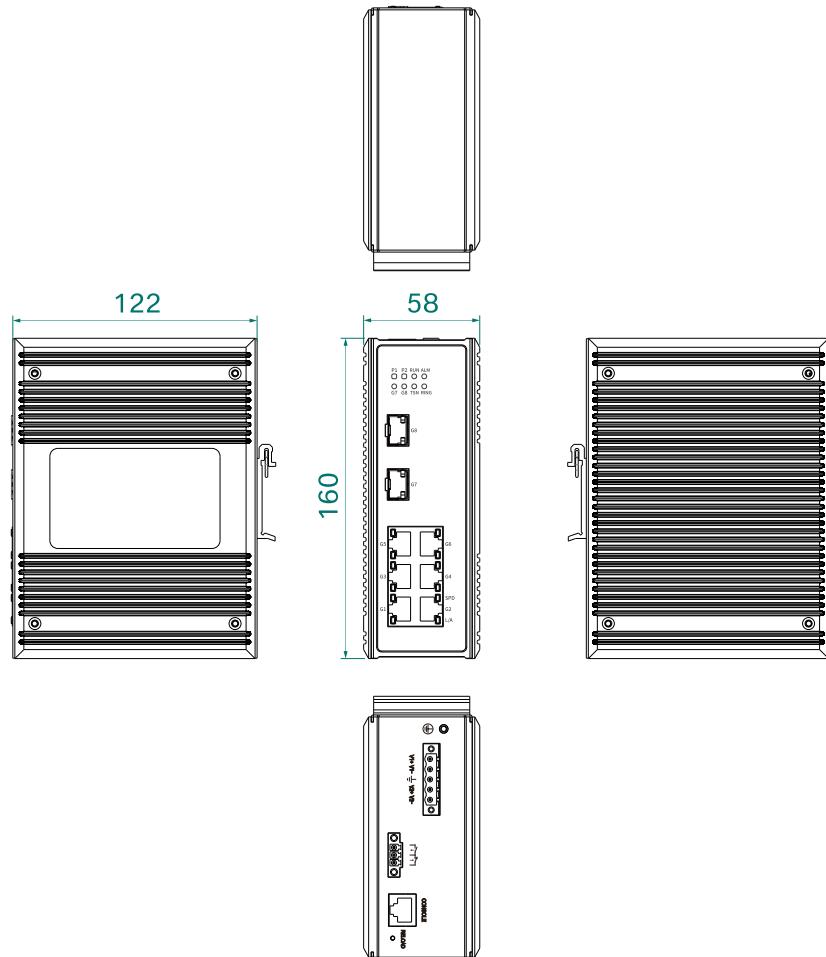



Ordering Information

Standard Model	1G Fiber Port	1G Copper Port	Input Voltage
MISCOM7208TSN-2GF-6GT	2	6	Dual DC9~60V
MISCOM7208TSN-2GF-6GT-AD220	2	6	AC85~264V/ DC110~370V

**Contact Us****Wuhan Maiwe Communication Co., Ltd**

Address: No.52 Liufang Avenue, East lake High-tech
Development Zone, Wuhan, China.

Tel: 027-87170215/16

Fax: 027-87170217

Mail: enquiry@maiwe.com

Official site: www.maiwe.com

Copyright © Maiwe Communication All rights reserved