

MIEN3206G-2GF-4GT

6-port Full Gigabit Din-Rail Layer 2 Unmanaged Industrial Ethernet Switch

Product description

MIEN3206G is a high-performance unmanaged industrial Ethernet switch with 2 Gigabit FX ports and 4 Gigabit TX ports, all support 10/100/1000M auto-adaptive, which is suitable for applications with large bandwidth requirements. It has a power failure alarm output function, which is convenient for field engineers to find and handle faults in time. MIEN3206G series can be operated at wide temperatures range from -40 to 85°C, and its IP40 casing house satisfies any harsh industrial environment.



Features:

- 2 Gigabit SFP ports(Support 100M SFP port) + 4 Gigabit RJ45 ports
- Support 10Base-T/100Base-TX/1000Base-T Adaptive Port (full/half duplex), Automatic MDI/MDI-X Connection
- Support Power-down Status Reply Alarm Output.
- Compact IP40 Rated Casing House with Fanless Design
- Industrial Grade Power Supply with Anti-reverse/Overcurrent/Overvoltage/EMC Protection
- Lightning Protection Standard 10/700us: CM 6kV-150A and DM 2kV-50A
- 40°C ~85°C Operating Temperature
- Wide-Ranging Redundant Power Design
- Satisfy Harsh Industrial Environment

Product specification

Technical Parameters

Protocol Standard	IEEE802.3(Ethernet), IEEE802.3u(100Base-TX&100Base-FX), IEEE802.3x (Flow control), IEEE802.3z(1000Base-LX), IEEE802.3ab(1000Base-T)
-------------------	---

Switch Capability

MAC Table Size	1k
Switch Bandwidth	14Gbps
Switch Latency	<5μs
Transmission rate	1.25Gbps

Interface

Gigabit port	Number: 6
	Connector: SFP 100M/ Gigabit port or Gigabit RJ45 port
	Baud rate: 1000Base-FX(SFP), auto-negotiation 10/100M-TX
Terminal block for relay alarm	5.08mm terminal block, 1A@24VDC
Terminal block for power input	5.08mm terminal block

Communication Distance

Twisted-pair	100m(CAT5/CAT5e cable)
Multi-mode fiber	Gigabit multi-mode: 850nm, 550m
Single mode fiber	Gigabit single mode: 1310nm, 20km

LED Indicator Lights

Front panel LED lights	Port light: LINK/ACT; SPEED
	Power status light: PWR1; PWR2

Power

Input power	DC9-60V ,support non-polarity power input AD220V:DC85-264V or DC110-370V
Power consumption	<3.5W@24V(MAX)
Overload protection	support
Inversed protection	support

Working Environment


Operating temperature	-40°C~85°C
Storage temperature	-45°C~85°C
Ambient humidity	5%~95%

Physical Characteristics

Wuhan Maiwe Communication Co., Ltd
 Tel: 027-87170215/16 Fax: 027-87170217
 Add: No.52 Liufang Avenue, East lake High-tech Development Zone, Wuhan, China.

Shell	IP40 protection, aluminum alloy shell
Installation	Standard 35mm DIN-rail Mounting
Dimension	35mm*140mm*100mm
Industry Standard	
EMC	EN61000-4-2(ESD), Level 4 EN61000-4-3(RS), Level 4 EN61000-4-4(EFT), Level 4 EN61000-4-5(Surge), Level 4 EN61000-4-6(CS), Level 4 EN61000-4-8, Level 5
Impact	IEC60068-2-27
Falling	IEC60068-2-32
Shock	IEC60068-2-6
Warranty	
Warranty	5 Years
Certification	CE, FCC, RoHS

Dimension

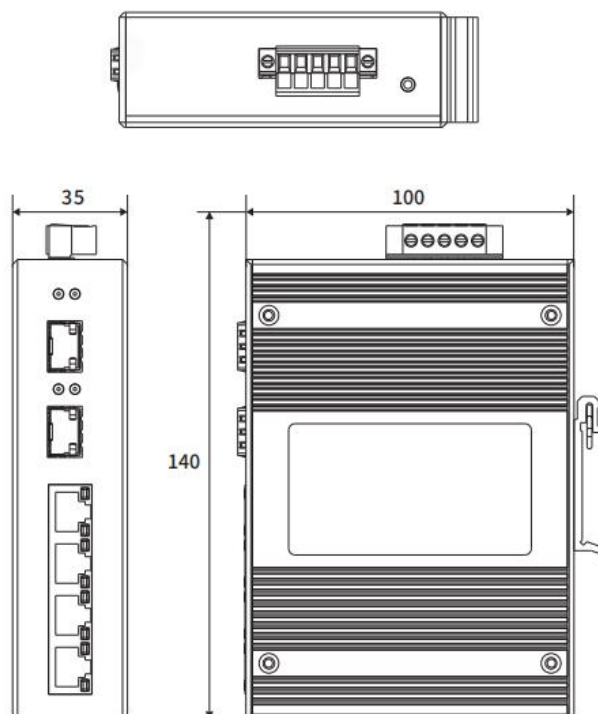

Ordering information

MIEN306G-2GF-4GT	2x100/1000M SFP port +4x10/100/1000M RJ45 ports, redundant DC9-60V power supply
MIEN306G-2GF-4GT-AD220	2x100/1000M SFP port +4x10/100/1000M RJ45 ports, AC85-264V/DC110~370V isolated power supply