

Gladius 8

7.85" Rugged IoT Handheld Device with Quad-core Processor



Features

- Fully rugged for warehousing / transportation / medical / mPOS applications
- MIL-STD-810G & IP-65 certified, 1.5m (5ft.) drop resistance
- 7.85" TFT color LCD 1024 x 768 HD resolution
- Projected capacitive multi-touch panel with anti-reflection Corning® Gorilla® glass
- High mobility with multiple connectivities including WLAN, Bluetooth and WWAN
- Built-in 1D barcode reader / 2D barcode imager
- Field replaceable battery with optimized battery life up to 10 hours
- Qi standard wireless charge supported
- G-sensor, gyroscope, light sensor, E-compass, GPS navigation & barometer
- System access control via RFID/NFC reader

Durability Features

MIL-STD-810G & IP-65 certified

1.5m (5ft.) drop-resistance

Raised bezel for LCD impact protection

I/O ports with hinged rubber covers

System

CPU MTK MT8382 Quad-core Cortex™A7 1.3GHz CPU PowerVR™ Series5XT GPU

OS Android™ v4.2

Memory 1GB

Storage 8GB

Integrated microphone

Audio Integrated speaker

1 x 3.5mm stereo headphone jack

Peripherals and Devices

Camera Front: 2.0 MP camera
Rear: 8.0 MP AF camera with LED

Accelerometer (G-sensor)

Sensor 3-axis digital gyroscope

Barometer

Light Sensor Ambient light sensor

NFC ISO/IEC 21481 Type A, Type B, Felica

WLAN Integrated IEEE 802.11 b/g/n

Wi-Fi certified Miracast™

Bluetooth Integrated Bluetooth 4.0 + EDR class 2, with HID input, A2DP, DUN, HFP, SPP & PBAP supported

WWAN UMTS Rel.8/HSPA+/TD-SCDMA

Navigation GPS, AGPS & digital compass

Barcode Scanner 1D barcode reader with physical trigger button

I/O Interface

USB Port 1 x micro USB 2.0 port

SD Slot 1 x microSD card slot

SIM Socket 2 x SIM card slots

HDMI 1 x mini-HDMI port

Expansion microSDHC

LCD Display

Size/Type 7.85" TFT LCD

Resolution 1024 x 768

Touch Screen

Type 5-point Projected Capacitive Touch screen
Corning® Gorilla® glass coating w/ anti-reflection coating
Optional optical bonding sunlight readable technology

Power Supply

Power System External AC power adapter

Battery Type Lithium-ion rechargeable battery

Field replaceable (for maintenance)

Qi standard wirelessly rechargeable

Battery Capacity 3.7V, 6200mAh, 22.94Wh

Battery Life Up to 10 hours battery life with the following operations:

1. Continuous audio playback of 160-Kbps encoded MP3 files
2. Internet browsing by Wi-Fi while:
 - a. Browsing snapshot versions of 20 separate web pages
 - b. Using hourly push-email

Continuous video playback for 8 hours

Adapter Input Input: AC100~240C, 50~60 Hz

Adapter Output DC power output: 5V/1.5A

Mechanical & Environmental

Operating Temp. -4°F ~ 140°F (-20°C ~ 60°C)

Storage Temp. -40°F ~ 167°F (-40°C ~ 75°C)



Operating Humidity 95% (non-condensing)

Dimensions (W x D x H) 145.0 x 218.0 x 19.8 mm

Weight 550g (with battery)

Gladius 8

Rugged Handheld Device

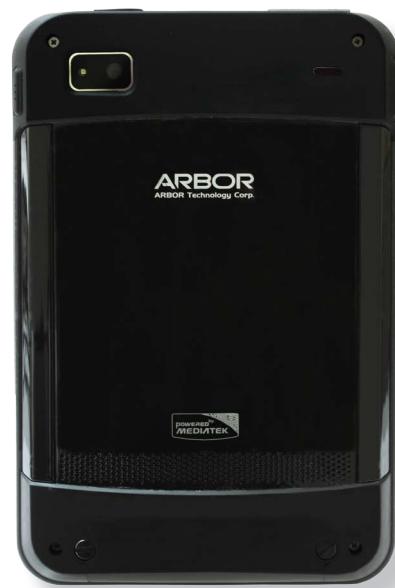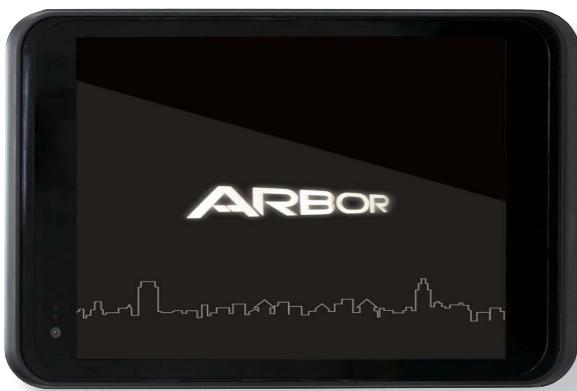

Standard Accessories

Universal power adapter



Rechargeable Li-ion battery pack



Earphone



Quick Start Guide

Optional Accessories

D.Dock-G8

Desktop cradle w/ Qi standard wireless charger



V.Dock-G8

In-vehicle docking w/ Qi standard wireless charger



OEM Configuration

MSR reader

1D/2D barcode imager

*Please contact ARBOR's sales representatives in your local area.