

R15IB7T-CHA3WT

15" Intel® Celeron® N2930 Chassis Wide Temperature Panel PC



KEY FEATURES

- 15" TFT LCD
- Intel® Celeron® Bay Trail-M N2930, 1.83 GHz Processor
- SODIMM DDR3L 1600/1333, max. 8 GB
- 2 x RS232, 1 x RS232/422/485, 1 x USB 3.0, 3 x USB 2.0, 2 x RJ45, 2 x PS/2, 1 x VGA, 1 x SATA II, 2 x Mini PCIe, 1 x eDP
- Front IP65 protection against water and dust
- -20~60°C operating temperature




SPECIFICATIONS

Display			
Resolution	1024x768	Size	15.0 inches
Contrast Ratio	2500:1	Panel Brightness	500.0 nits
View Angles	88,88,88,88	Active Area	304.1x228.1 mm
Touch / Glass	Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional)		
System Specification			
Processor	Intel Celeron N2930 1.83GHz (up to 2.16GHz)	Memory	2 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
Storage	1 x mSATA SSD 128GB mSATA SSD up to 512GB (Optional) 1 x SATA II for 2.5" HDD (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Operating System	Windows 7 Embedded Systems (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 20.04 (Optional)	WLAN	Support (Optional)
BT	Support (Optional)		
Mechanical			
Dimension	360 x 290 x 79 mm	Weight	4.2 kg
Mounting	VESA Mount	Enclosure	Metal Housing
Cooling System	Fanless design		
Environment			
Operating Humidity	30% to 90% RH, Non-Condensing	Operating Temperature	-20°C to 60°C
Storage Temperature	-25°C to 65°C		
Certification			
Certification	CE, FCC		
IO Ports			
Power Input	1 x 12V DC, Din4 pin connector	USB Port	1 x USB3.2 Gen1x1 (Type-A) 3 x USB2.0 (Type-A)
Serial Port	1 x RS232/422/485 (Default RS232) 2 x RS232 1 x RS232 (Optional)	Video	1 x VGA

Audio	Mic in Line in Line out	Expansion Port	2 x mPCIe slot
LAN	2 x Giga LAN RJ45 Connector	Indicator	1 x LED Indicator for power 1 x LED Indicator for storage
Brightness Knob	1 x Brightness Adjustment Knob	PS/2	2 x PS/2
mini PCIe	3 x Mini PCIe		
Control			
Button	1 x Power Button 1 x Reset Button		
Accessory			
Accessory	100~240V AC to DC Adapter Power Cord VESA screws		
Power			
Power Rating	12V DC	Adapter	12V 50W

DIMENSIONS UNIT:MM

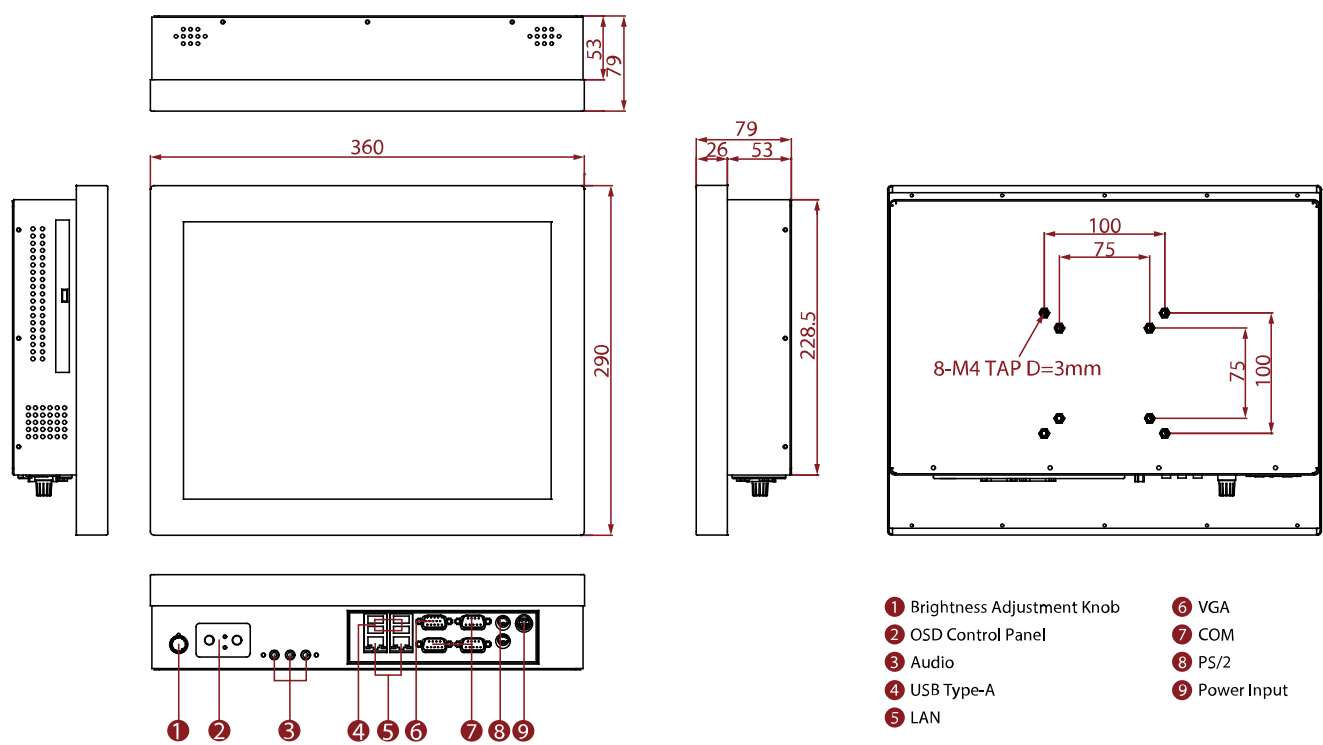

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.