



## Main Features

- 16:9 Full HD, 1920 x 1080 fanless panel computer
- Powerful 4th generation Intel® Core™ i processor
- Two expansion slots for add-on PCI or/and PCIe cards
- Optional 3.5G/Wi-Fi module/2.5" HDD
- Inside USB 2.0 type A connector for license key
- Metal housing with robust aluminum IP66 compliant front bezel for harsh environment
- Two FBI ports support fieldbus module (optional)

## Product Overview

IPPC 2170P is a heavy industrial panel PC to support powerful 4th generation Intel® Core™ i processor, TFT LCD panel with LED backlight and userfriendly touch screen. It provides two expansion slots to support PROFINET, PROFIBUS, DeviceNet, EtherNet/IP and EtherCAT protocols. The IP66 rated heavy-duty aluminum front bezel and the vibration-resistant rugged chassis are specifically designed for outdoor and harsh industrial environments. IPPC 2170P is ideal for use in oil and gas rig, wind farms, chemical factories, pharmaceutical factories, and hazardous working area.

## Specifications

### Panel

- LCD size: 21.5", 16:9
- Resolution: Full HD, 1920 x 1080
- Luminance: 300cd/m<sup>2</sup>
- Contrast ratio: 5000
- LCD color: 16.7M
- Viewing angle: 89(U), 89(D), 89(L), 89(R)
- Backlight: LED

### Touch (for IPPC 2170P Series)

- Ten points P-Cap (projected capacitive touch)
- Light transmission: 87%
- Interface: USB
- Anti-scratch surface: >= 6H hardness

### System

- CPU (optional): support 4th gen. Intel® Core™ i processor family, LGA1150 socket type
  - Core™ i5-4590T, Quad Core, 2.0GHz, 6M Cache (maximum frequency 3.0GHz if turbo boost enabled)
  - Core™ i5-4570TE, Dual Core, 2.7GHz, 4M Cache (maximum frequency 3.3GHz if turbo boost enabled)
  - Core™ i3-4350T, Dual Core, 3.1GHz, 4M Cache (no turbo boost)
  - Core™ i3-4340TE, Dual, Core, 2.6GHz, 4M Cache (no turbo boost)
  - Pentium® G3320TE, Dual Core, 2.3GHz, 3M Cache (no turbo boost)
  - Celeron® G1820TE, Dual Core, 2.2GHz, 2M Cache (no turbo boost)
- BIOS: AMI BIOS
- System chipset: Intel® Q87 PCH
- System memory (optional): 2 x 204-pin DDR3/DDR3L SO-DIMM


socket, support up to 16GB DDR3/DDR3L 1333/1600, non-ECC and unbuffered

- Storage device:
  - 1 x External locked CFast socket
  - 1 x mini-PCIe w/o SIM card holder slot to support mSATA storage
  - 1 x Hard drive bay: support 1 x 2.5" SATA HDD/SSD (optional)(for DC model only)
- Watchdog timer: Watchdog timeout can be programmable by software from 1 second to 255 seconds and from 1 minute to 255 minutes (tolerance 15% under room temperature 25°C)
- H/W status monitor: monitoring system temperature and voltage
- Expansion:
  - 2 x mini-PCIe sockets (support optional Wi-Fi or 3.5G module/NVRAM/mSATA storage)
  - 2 x expansion slots for add-on PCI or/and PCIe cards
  - 1 x PCI and 1 x PCIe4 slots
  - 2 x PCIe4 slots (default)
  - 2 x PCI slots
  - 1 x PCIe16 slot

### Rear I/O

- 1 x PS2 for keyboard/mouse
- Ethernet: 2 x RJ45
- 2nd/3rd display: additional independent DisplayPort: 1 x DVH (DVI-D + DVI-A) and 1 x DisplayPort
- Audio port: 1 x Line-out; 1 x Line-in; 1 x Mlic-in
- USB: 4 x USB3.0
- 3-pin remote power on/off switch connector
- Reset button

## Dimension Drawing

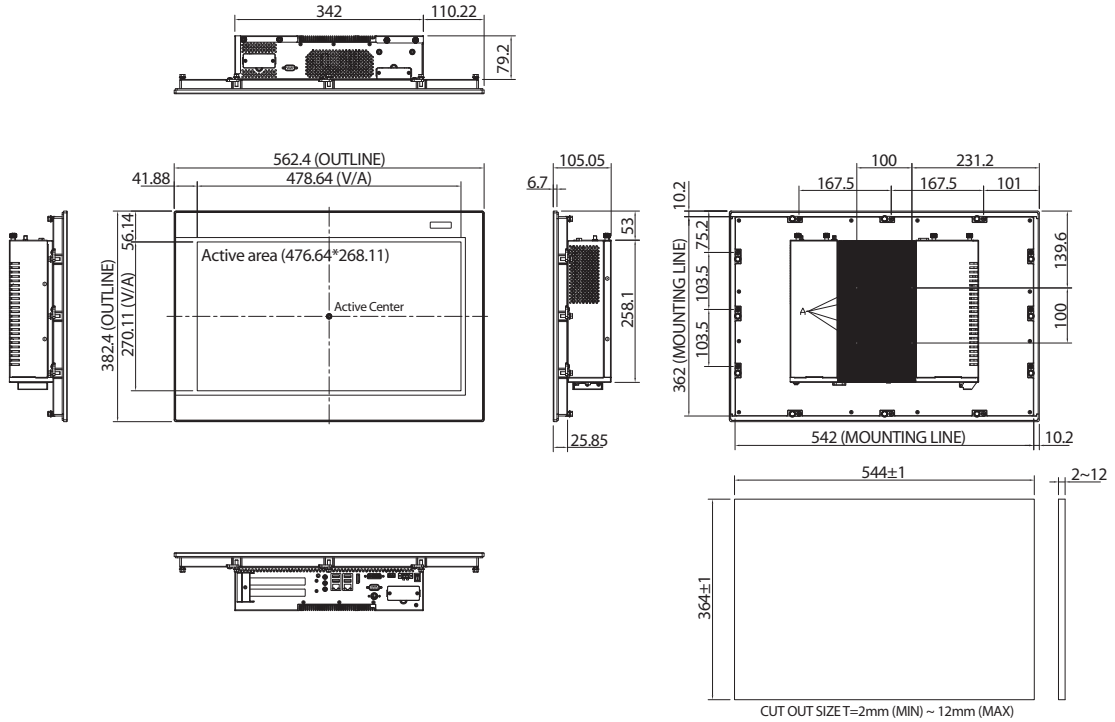

- COM#1: RS232/422/485 w/ 5V or 12V selection (for T/P-DC only)
- ATX power switch (for T/P-DC only)

### Top I/O

- COM#2 RS232/422/485 w/ 5V or 12V selection (for T/P-DC only)

### Audio

- HD codec: Realtek ALC886-GR
- Audio interface: Line-out/Line-in/Mic-in audio jack

### Ethernet

- LAN chip: dual Intel® I210IT Gigabit LAN
- Ethernet interface: 10/100/1000 Base-Tx Ethernet compatible

### Fieldbus

- Support up to two Fieldbus module

### Mechanical & Environment

- Color: Pantone 432C\RAL 70 24 front bezel
- Enclosure: aluminum front bezel with SPPC nickel plated housing
- IP protection: IP66 front
- Mounting: panel/wall/stand/VESA 100mm x 100mm
- Power: IPPC 2170P
  - Power input: 12~30 VDC
  - Power connector: 3-pin PHOENIX connector
- Vibration:
  - IEC 68 2-64 (w/ HDD)
  - 1Grms @ sine, 5~500Hz, 1hr/axis (HDD operating)
  - 2Grms @ sine, 5~500Hz, 1hr/axis (CFast operating)
  - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- Shock:
  - IEC 68 2-27
  - HDD: 20G @ wall mount, half sine, 11ms
- Operating temperature:
  - Resistive: -10°C to 50°C
  - P-Cap: -10°C to 50°C
  - Storage temperature: -20°C to 75°C
- Operating humidity: 10%~90% relative humidity, non-condensing (for IPPC 2170P series, limits to be at 90% RH at max 50°C)

### Dimension

- 562.4 x 382.4 x 105.05mm
- Weight: (barebone): 11.7kg

### Certifications

- CE (including EN61000-6-2/EN61000-6-4), FCC Class A

### OS Support Lists

- Windows 7 32-bit and 64-bit
- Windows 8.1 32-bit and 64-bit
- Windows 10 32-bit and 64-bit

## Ordering Information

### System

- **IPPC 2170PE2-DC (P/N: 10I12170P00X0)**  
21.5" Full HD WXGA LED backlight fanless P-CAP touch panel PC, 2 x COM, DC power input, and optional fieldbus module

### Options

- **24V, 120W AC/DC power adapter w/o power cord (P/N: 7400120023X00)**
- **PROFINET, EtherNet/IP, EtherCAT, SERCOSIII master interface module: FBI90E-REM(P/N:10J50090E08X0)**
- **PROFINET master interface module: FBI90E-PNM (P/N: 10J50090E21X0)**
- **PROFIBUS master interface module: FBI90E-PBM (P/N:10J50090E09X0)**
- **DeviceNet master interface module: FBI90E-DNM (P/N:10J50090E10X0)**
- **EtherCAT master interface module: FBI90E-ECM (P/N:10J50090E19X0)**
- **EtherNet/IP master interface module: FBI90E-EPM (P/N:10J50090E20X0)**