



## Main Features

- ♦ IP66 compliant and metal housing with robust aluminum front zero bezel for harsh environment
- ♦ 10 points P-Cap multi-touch with zero bezel flush front design
- ♦ 3 display input interface: Analog VGA/DVI-D/Display Port
- ♦ Shares identical appearance with IPPC series
- ♦ Ultra slim in depth
- ♦ OSD multilanguage function
- ♦ All connectors with lock
- ♦ Mounting support: panel/wall/stand/VESA 100mm x 100mm
- ♦ Wide range power input 12V~24V DC

## Product Overview

15.6" 16:9 LCD display IPPD 1600P is based on a ten points P-Cap multi-touch screen with resolution up to 1366 x 768 Panel. IPPD 1600P has system grade grounding protection which means chassis grounding and power grounding design to avoid in-rush current damage monitor. IPPD 1600P is ideal for space-critical environments where systems and displays are kept apart. In addition, IPPD 1600P adopts zero bezel flush panel design and has IP66 front panel. IPPD 1600P provides prevailing video interface: VGA, DVI-D and Display Port, supporting both digital and analog signals. Moreover, IPPD 1600P supports 12~24V power input and offers panel mount and VESA mount, allowing users to choose the mounting method that meets their situation. IPPD 1600P is the best solution for NEXCOM NISE fanless computer, NVIS security surveillance series and APPC/IPPC panel PC when a second display is required.

## Specifications

### Panel

- ♦ LED size: 15.6", 16:9
- ♦ Resolution: WXGA 1366 x 768
- ♦ Luminance: 300cd/m<sup>2</sup>
- ♦ Contrast ratio: 500
- ♦ LCD color: 16.7M
- ♦ Viewing angle: 80(U), 80(D), 85(L), 85(R)
- ♦ Backlight: LED

### Touch

- ♦ Ten points P-Cap (Projected Capacitive Touch)
- ♦ Touch light transmission: 87%
- ♦ Anti-scratch surface: 7H hardness
- ♦ Touch interface: USB
- ♦ Windows 8 compliance

### Rear I/O

- ♦ Touch interface port: USB with Lock
- ♦ Video port: VGA (1xDB15)/DVI-D (1xDVI-D connector)/Display port
- ♦ DC power input connector: 3-Pin Phoenix terminal Blocks

### OSD Function

- ♦ OSD keypad
- ♦ Multilanguage OSD


### Mechanical & Environment

- ♦ Color: Pantone 425C/RAL 70 24 front bezel
- ♦ IP protection: IP66 front
- ♦ Mounting: panel/wall/stand/VESA 100mm x 100mm
- ♦ System with panel mounting kit w/o panel mounting hole
- ♦ Power input: 12V~24VDC
- ♦ Power adapter: optional AC to DC power adaptor (+12V, 60W)
- ♦ Vibration:
  - IEC 68 2-64
  - 2Grms @ sine, 5~500Hz, 1hr/axis (operating)
  - 2.2Grms @ random condition, 5~500Hz, 0.5hr/axis (non-operating)
- ♦ Shock:
  - IEC 68 2-27
  - HDD: 20G@wall mount, half sine, 11ms
- ♦ Operating temperature: -10°C to 60°C
- ♦ Storage temperature: -20°C to 75°C
- ♦ Operating humidity: 10%~90% relative humidity, non-condensing
- ♦ Dimension: 417.4 x 312.4 x 51.75mm
- ♦ Weight: 5.48Kg

### Certifications

- ♦ CE (including EN61000-6-1/EN61000-6-2/EN61000-6-3/EN61000-6-4)
- ♦ FCC Class B

## Dimension Drawing

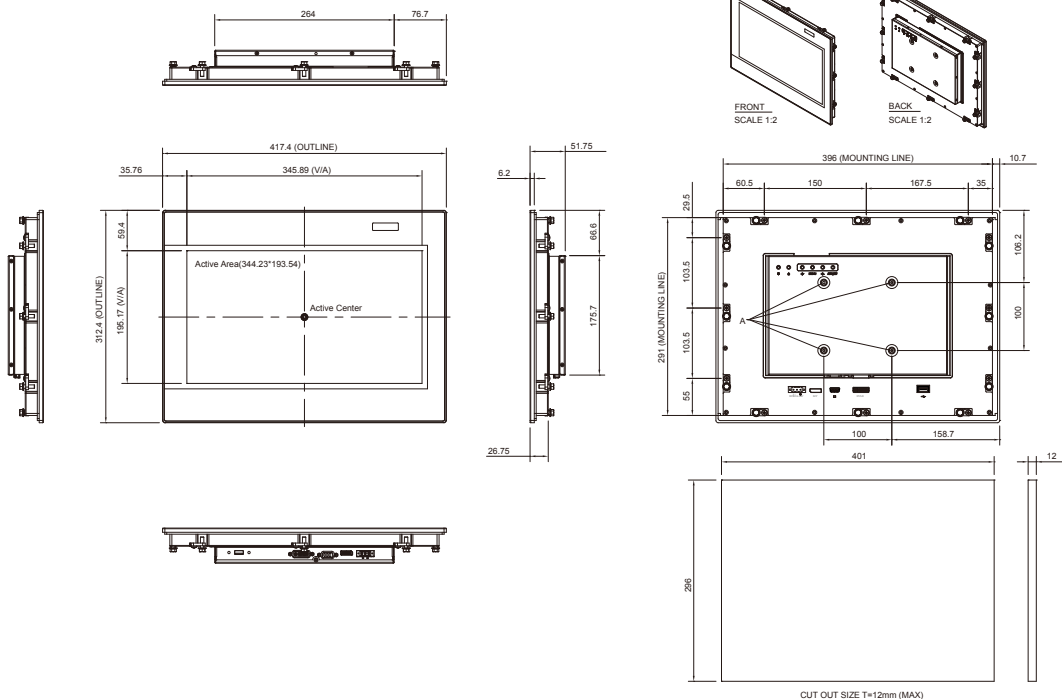

## Ordering Information

### Barebone

- ♦ **IPPD 1600P (P/N: 10II1600P00X0)**  
15.6" WXGA Heavy Industrial 16:9 LED backlight P-Cap touch monitor with VGA, DVI-D and Display port input, 12~24VDC input

### Option

- ♦ **12V, 60W AC/DC power adapter w/o power cord (P/N: 7400060019X00)**
- ♦ **1.8m DVI-D male to DVI-D male cable (P/N: 60233DVI28X00)**
- ♦ **1.8m Display port Cable (P/N: 6030000122X00)**