

NISE 3142M

Intel® Core™ 2 Duo Fanless System with IEEE1394b, Dual DVI-D Display Outputs and 1x Expansion Slots



Main Features

- Support Intel® Core™ 2 Duo / Celeron® processor
- Intel® GM45 chipsets
- Dual Intel® 82574L Gigabit Ethernet ports; Support WoL, PXE and teaming
- Dual DVI-D Independent display
- 5x RS232 and 1x RS232/422/485 with Auto Direction Control
- One external locked CFast socket (SATA Interface)
- Dual IEEE1394b ports
- Support +16V to 30VDC power input and ATX power mode

Product Overview

NISE 3142M fanless computer supports Intel® Core™ 2 Duo and Celeron® socket type processor. Upgraded with two DVI-D and CFast SATA interfaces, NISE 3142M transfers data faster than its predecessor NISE 3140 and can present high-definition images simultaneously in dual large independent displays. The feature makes NISE 3142M apt for eSOP.

Along with fanless design, it can adapt to filthy environments rife with greasy dusts. In addition, NISE 3142M with multiple I/O options is a future proof solution, which is ideal for applications within industrial automation, factory automation, automatic optical inspection, ATMs, public infotainment, in-vehicle signage, and surveillance as well as data acquisition.

Specifications

Main Board

- NISB3142
- Support Intel® Core™ 2 Duo processor T9400 (6M cache, 2.53GHz, 1066MHz FSB)
- Support Intel® Core™ 2 Duo processor P8400 (3M cache, 2.26 GHz, 1066MHz FSB)
- Support Intel® Celeron® processor 575 (1M cache, 2.0GHz, 667MHz FSB)

Main Memory

- 2x 240-pin DIMM, up to 4GB DDR3 800/1066 MHz SDRAM, un- buffered and non-ECC

Chipset

- Intel® GM45 graphics and Memory Controller Hub
- Featuring the mobile Intel® Graphics Media Accelerator 4500MHD
- Intel® 82801IEM I/O (ICH9M-E) Controller Hub

I/O Interface-Front

- ATX power on/off switch
- HDD access/power status LEDs

- 1x front access CFast card socket (SATA interface)
- 2x USB2.0 ports
- Dual IEEE1394b ports


I/O Interface-Rear

- 2-pin Remote Power on/off switch
- 2-pin System signal
- +16V to 30VDC input
- 2x DB9, COM5 & COM6, RS232
- 1x DB44 Serial Port for 4x RS232 (COM2: RS232/422/485 with Auto Flow Control)
- 2x GbE LAN ports (support WoL, PXE & LAN teaming)
- 4x USB2.0 ports
- 2x DVI-D Port
- 1x Line-out and 1x Mic-in

Storage

- 2x 2.5" SATA HDD drive bay
- 1x external locked CFast card socket (SATA Interface)

Dimension Drawing

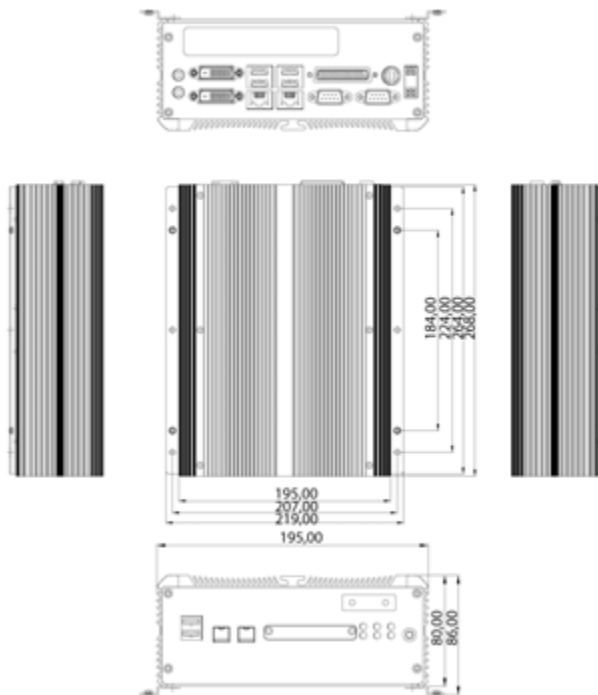

Expansion Slot

- One PCI expansion (10W max./per slot)
- Add-on card length:
 - 169 mm max. with HDD installed
 - 240 mm max. without HDD installed

Power Input

- ATX power mode
- OnBoard DC to DC power support from +16 to 30VDC
- Optional power adapter

Dimensions

- 195mm(W)x 268mm(D)x 80mm(H) (7.7"x 10.5"x 3.1")

Construction

- Aluminum chassis with fanless design

Environment

- Operating temperature:
 - Ambient with air flow: -5°C to 55°C
 - (According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- Storage temperature: -20°C to 80°C
- Relative humidity: 10% to 93% (Non-Condensing)
- Shock protection:
 - HDD: 20G, half sine, 11ms, IEC60068-2-27
 - CFast: 50G, half sine, 11ms, IEC60068-2-27
- Vibration protection w/ HDD Condition
 - Random: 0.5Grms @ 5~500 Hz according to IEC60068-2-64
 - Sinusoidal: 0.5Grms @ 5~500 Hz according to IEC60068-2-6

Certifications

- CE approval
- FCC Class A

Ordering Information

Barebone

- ♦ **NISE 3142M (P/N: 10J00314201X0) RoHS Compliant**
Intel® Core™ 2 Duo / Celeron® fanless barebone system with dual DVI-D display outputs and one PCI expansion slot
- ♦ **19V, 120W AC/DC power adapter w/o power cord (P/N: 7410120002X00)**