



## Main Features

- OnBoard Intel® Atom™ E620 processor, 0.6GHz
- OnBoard DDR2 512MB memory chip
- 2x Intel® GbE LANs
- 3x USB2.0 / 1x VGA / 3x Serial Ports / 1x CAN bus
- 8CH GPI and 8CH GPO
- Support 1x 2.5" HDD Drive Bay
- Support 12V and 24VDC input

## Product Overview

Equipped with Intel® Atom™ E620 0.6GHz processor and Intel® Platform Controller Hub EG20T, the NISE 90 fanless computer features low power consumption of only 15W and an abundance of I/O options to meet the requirements of factory and industrial automation control.

Featuring fanless design, the NISE 90 is able to offer optimum reliability and performance. In addition, the NISE 90 is equipped with an abundance of I/O interfaces, such as GPIO, CAN BUS, 3x COM ports, two Intel GbE LAN and DC Input (either 12V or 24VDC) that provide flexibility for various application designs.

## Specifications

### Main Board

- OnBoard Intel® Atom™ Tunnel Creek E620 processor, 0.6GHz  
512K Cache
- OnBoard Chipset: Intel® EG20T

### Main Memory

- OnBoard DDR2 512MB memory chip, unbuffered and non-ECC support

### Storage Device

- 1x 2.5" SATA HDD drive bay for optional SSD or HDD
- Support optional SATA DOM, Horizontal type only

### I/O Interface-Front

- 3x USB ports
- 2x RJ45 GbE LAN ports, Intel 82574L controller onBoard  
Support LAN teaming function
- 3x DB9 Serial ports  
COM1: Support RS232/422/485 (Selected on BIOS menu)  
COM2: Support RS232 only  
COM3: Support RS232 only

- 1x DB9 CAN Bus
  - Support CAN 2.0b protocol
  - Support both 11-bit and 26-bit identifiers
  - Support bit rates up to 1Mbps
  - Clock frequency of 40MHz

### I/O Interface-Bottom

- 1x DB15 VGA port
- 1x DB15 male connector for 8CH General Purpose Input
- 1x DB15 male connector for 8CH General Purpose Output
- 3-pin DC input, support 12VDC input and 24VDC input
- 1x Power on/off switch


### Supported OS

- Windows XP
- Windows Embedded Standard 2009
- Fedora 14 (Kernel 2.6)

### System Dimension

- 59mm (W) x 140mm (D) x 167mm (H)

## Dimension Drawing

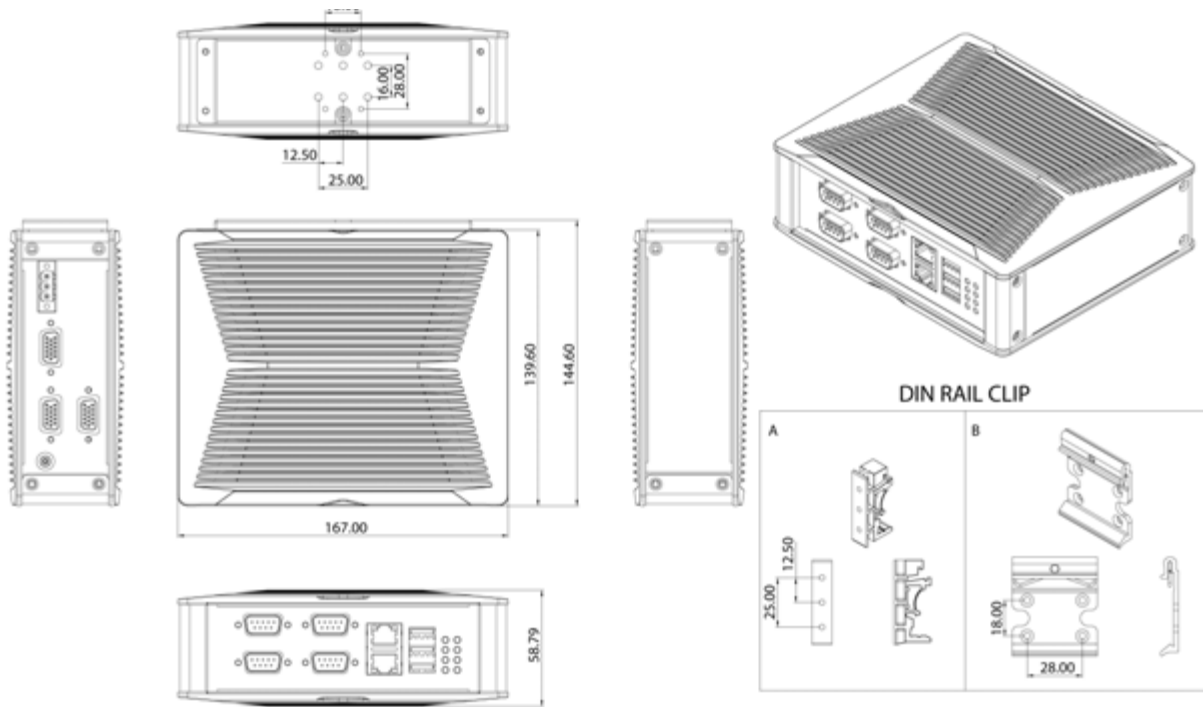

### Construction

- ♦ Aluminum chassis with fanless design

### Environment

- ♦ Operating temperature:  
Ambient with air flow: -5°C to 55°C  
(According to IEC60068-2-1, IEC60068-2-2, IEC60068-2-14)
- ♦ Storage temperature: -20°C to 80°C
- ♦ Relative humidity: 10% to 93% (non-condensing)
- ♦ Shock protection: 20G, half sine, 11ms, IEC60068-2-27
- ♦ Vibration protection
  - Random: 0.3Grms @ 5~500 Hz according to IEC60068-2-64
  - Sinusoidal: 0.3Grms @ 5~500 Hz according to IEC60068-2-6

### Certifications

- ♦ CE
- ♦ FCC Class A

## Ordering Information

- ♦ **NISE 90 (P/N: 10J00009000X0)**  
DIN Rail fanless system with Intel® Atom™ E620 0.6GHz processor and DDR2 512MB memory onBoard
- ♦ **12V, 60W AC/DC power adapter w/o power core (P/N: 7400060014X00)**
- ♦ **Aluminum DIN Rail mounting kit (P/N: 88J00009001X0)**
- ♦ **Wallmount kit (P/N: 88J00009002X0)**