

ARP970

15" LCD, Core i5, i7 Mobile Processor
Rugged Multi-Slot Portable Computer



Features

- All-in-one design rugged portable computer
- Compact Size Lightweight Design
- Built-in 15" LCD display with tempered glass
- Intel Core i5-2510E or i7-2710QE Processors
- 100~240VAC, 250W Power Supply
- Industrial Keyboard multi-language with touchpad
- 3x PCI-E full-length expansion slots
Option 3x PCI-X, or 2 PCI, 1PCI-E (x16) slots
- Built-in 500GB, Support 2x 2.5" removable HDD
- Dual Gigabit Ethernet, 2x COM Port
- Carrying case to manage portable PC with ease



Ordering Information

ARP970-15USA

15" LCD, i5-2510E CPU, 2x 4G RAM, 3 PCI-E slots,
500G HDD, DVD-RW, 250W PSU, Carrying case


ARP970-15USB

15" LCD, i5-2510E CPU, 2x 4G RAM, 3 PCI-X slots,
500G HDD, DVD-RW, 250W PSU, Carrying case

ARP970-15USC

15" LCD, i5-2510E CPU, 2x 4G RAM, 2 PCI, 1PCI-E (x16) slots,
500G HDD, DVD-RW, 250W PSU, Carrying case

Note: Keyboard layout: CH, FR, GR, KR, RU, SP, UK, US

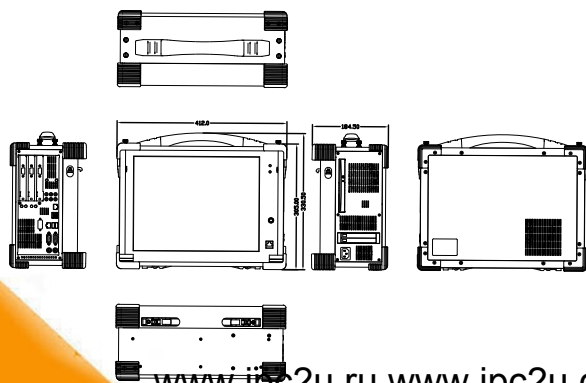

Specification

Model No	ARP970
Construction	Rugged Aluminum Construction with rubber corners
CPU	Intel Core i5-2510E, 3M Cache, 2.50GHz Processors Option: Intel Core i7-2710QE, 6M Cache, 2.10GHz
Chipset	Intel Qm77 Express Chipset
Slot	3x PCI-E full-length expansion slots Option: 3x PCI-X full-length expansion slots Option: 2x PCI, 1PCI-E (x16) full-length expansion slots
Display	15" LCD display, 1024x 768, 16.2M, 250 nits Anti-reflection tempered strengthen glass
Memory	2x 4GB RAM
HDD	1x 500GB 2.5", 7200 rpm SATA HDD Support 2x 2.5" Removable SATA
CDROM	1x Slim DVD-RW
Interfaces	2x DB9 for COM1, COM2, DVI-D + DVI-I, DP 2x Gbit LAN RJ-45, RCA Jack 3x1 for HD audio 2x USB 3.0, 4x USB 2.0 connector
Audio	Intel® Qm77 built-in high definition audio controller With Realtek ALC892 for 7.1 CH audio
LAN	Intel 82579LM Gigabit LAN PHY Intel 82583V Gigabit LAN
Speaker	Built-in amplified 2x 3W speakers
KB/MS	87-key industrial keyboard with touchpad
PSU	250W, 100~240 VAC, Auto switch
Dimension	412x 330x 184 mm (Wx Hx D)
Weight	9 kgs
Carrying Case	Padded carrying case with wheels

Environmental Factors

	Operating	Non-Operating
Temperature	0°C~50°C	-20°C~60°C
Relative Humidity	10%~90%	10%~95%
Shock	10g, 11ms, half-Sine	30g, 11ms, half-Sine
Vibration	10-500Hz (0.4 Grms)	10-500Hz (1.12 Grms)
Approval	CE, FCC, RoHS	