

# eBOX626-842-FL

Fanless Embedded System with Intel® Celeron® J1900, HDMI, VGA, 2 GbE LAN, 4 USB, 3 COM and 10 to 34 VDC

## Features

- Intel® Celeron® J1900 2.0 GHz quad-core SoC
- 204-pin DDR3L-1066/1333 SO-DIMM, up to 8GB
- Fanless operation design with full feature I/O
- 2 RS-232/422/485, 1 RS-232 and 4 USB 2.0 ports
- One 2.5" 9.5 mm SATA drive bay and mSATA supported
- 2 PCI Express Mini Card slots and 1 SIM slot
- VGA and HDMI with dual-view supported
- 10 to 34 VDC wide range DC input




## Specifications

Standard Color	Silver-Black
Construction	Aluminum extrusion and heavy-duty steel, IP40
CPU	Intel® Celeron® J1900 2.0 GHz
System Memory	1 x 204-pin DDR3L-1066/1333 SO-DIMM, up to 8GB
Chipset	SoC integrated
BIOS	AMI
System I/O Outlet	2 x RS-232/422/485 (COM 1/2) 1 x RS-232 (COM 3) 1 x VGA 1 x HDMI 1 x Audio (Mic-in/Line-out) 2 x 10/100/1000Mbps Ethernet (Intel® i211AT) 4 x USB 2.0 3 x SMA type connector opening for antenna 1 x VDC power input connector 1 x ATX power switch
Watchdog Timer	255 levels, 1 to 255 sec.
Storage	1 x 2.5" 9.5 mm SATA HDD drive bay 1 x mSATA
Expansion Interface	1 x Full-size PCI Express Mini Card slot (USB + PCI Express signal) 1 x Half-size PCI Express Mini Card slot (USB + PCI Express signal) 1 x SIM slot
TPM	TPM 1.2
System Indicator	1 x green LED for system power-on 1 x orange LED for HDD active
Power Supply	42.5 W, 10 to 34 VDC
Operating Temperature	-20°C to +60°C (with E3826, W.T. SSD & DRAM/CAPA841) -20°C to +55°C (with J1900, W.T. SSD & DRAM/CAPA842)
Humidity	10% to 90% , non-condensing
Vibration Endurance	3 Grms with SSD (5-500Hz, X, Y, Z directions)
Dimensions	200 mm (7.87") (W) x 120 mm (4.72") (D) x 46 mm(1.81") (H)
Weight (net/gross)	1.1 kg (2.43 lb)/ 1.8 kg (3.97 lb)
Certificate	CE
EOS Support	WE8S, WES7

## Packing List

- 1 x quick manual
- 1 x driver cd
- 1 x screw pack
- 4 x foot pad

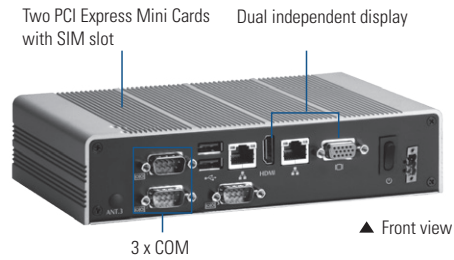

## Power Protection

- DC Version**
- OVP (over voltage protection)
  - OCP (over current protection)
  - UVP (under voltage protection)
  - Reserve protection

## Ordering Information

Standard	
eBOX626-842-FL-DC	Fanless embedded system with Intel® Celeron® J1900 2.0 GHz, VGA, HDMI, 2 GbE LANs, 4 USB, 3 COM and 10 to 34 VDC input

Optional	
2.5" SATA HDD	80GB or above
2.5" SATA SSD	40GB or above
DDR3L SO-DIMM	1GB - 8GB
wall mount	88606200010E
VESA arm kit	88606200020E
DIN-rail kit	88606200030E
Wi-Fi module	
Power cord	

\*Specifications and certifications may vary according to various options.

## Dimensions

