


iNA600

DIN-Rail Industrial-grade Network Appliance with Intel® Core™ i9/i7/i5/i3 & Xeon® Processor and Optional 16-port L2 Managed Switch

Features

- Intel® Core™ i9/i7/i5/i3 & Xeon® processor (Coffee Lake)
- 2 DDR4-2666 U-DIMM for up to 32GB of memory
- 16 ports L2 managed switch (8 port PoE for optional)
- Supports IPMI 2.0 remote management
- Module design for flexible and fast provision
- Supports NVIDIA® MXM GPU card (optional)
- Supports Intel® Movidius™ M.2 VPU card (optional)
- For edge AI inference, IIoT security and function virtualization

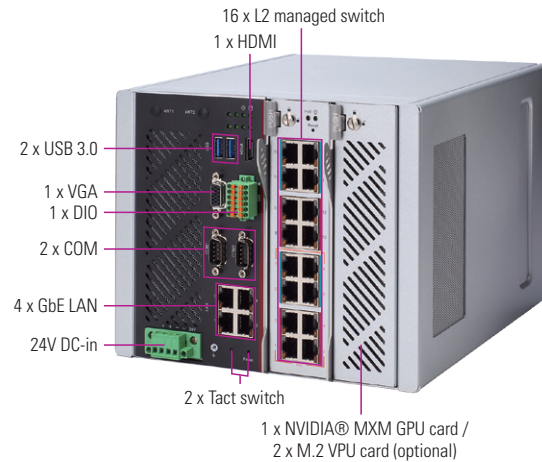

Specifications

System	
CPU	LGA1151 socket 8th Intel® Core™ i9/i7/i5/i3 & Xeon® (Coffee Lake)
Chipset	Intel® C246
Memory	DDR4-2666 U-DIMM, up to 32GB non-ECC/ECC memory
BIOS	AMI SPI Flash BIOS
Storage	2 x 2.5" SATA 3.0 SSD 1 x SATA DOM
Network Interface	4 x GbE RJ-45 (Intel® i350) (1-port share with IPMI) 1 x LAN module (optional), max. up to 16 LAN ports
I/O	1 x VGA and 1 x HDMI for Win10 (duplicate the display) 1 x VGA or 1 x HDMI for Linux 2 x USB 3.0 2 x COM port COM1 supports RS-232 and COM2 supports RS-232/422/485 2 x Tact switch 2 x Antenna hole 1 x Power input connector 8 x DIO (4-in/4-out) 4 x RJ-45 16 x RJ-45 (optional)
Expansion Interface	1 x PCIe Mini Card slot (USB + PCIe interface) 1 x PCIe x8 MXM slot for GPU card (optional) 2 x PCIe x4 M.2 or mPCIe slot for VPU (optional)
TPM	TPM2.0
IPMI	1 x IPMI 2.0 (optional)
Watchdog Timer	255 stepping for system reset
Power Supply	1 x 4-pin terminal block 24V
OS Compatibility	Win 10, Linux

Mechanical/ Environmental

Form Factor	DIN-rail
LED	8 x LED (Power, HDD, GPOx6)
Operating Temperature	-20°C to +60°C (-4°F to +140°F)
Humidity	10% to 95% RH, non-condensing
Chassis Material	Steel
Dimensions	214 mm (8.42") (W) x 265 mm (10.43") (D) x 176 mm (6.93") (H)
Weight (net/gross)	8kg (17.64 lb)/10kg (22.05 lb)
Certifications	CE

Ordering Information

Standard	
iNA600-D4GI-C246 (P/N: E27B600100)	DIN-rail industrial-grade network appliance with Intel® Core™ i9/i7/i5/i3 & Xeon® processor and optional 16-port L2 managed switch

Dimensions

