


DVI Optical KVM Extender / Long Distance DVI Optical KVM Extender

CE680 / CE690

- The CE680/CE690 is a DVI Optical KVM Extender that overcomes length restrictions of standard DVI cables by using fiber optics to send high-definition audio, video and control signals over longer distances. The CE680/CE690 can transmit KVM DVI signals over very long distances - from 600 m (CE680) to 20 km (CE690) away from the source. The extender takes audio/video streams from the local source and serializes the data to pass it over a single 3.125 Gbps optical link, for resolutions up to 1920 x 1200 @ 60 Hz, 24-bits, with picture-perfect quality.

In addition to extending keyboard and mouse control, the CE680/CE690 also transfers RS-232 signals (up to 115 kbps) and USB signals in both directions, with ports for both, allowing you to connect serial devices, such as barcode scanners, or USB devices such as touchscreens, which can provide access to a computer connected at the local site.

The CE680/CE690 allows access to a computer from both the local and remote consoles (USB keyboard, monitor and mouse). Furthermore, the CE680/CE690 takes advantage of the latest fiber optic cable technology to connect the local and remote units providing easy installation and vast extension of KVM DVI signals.

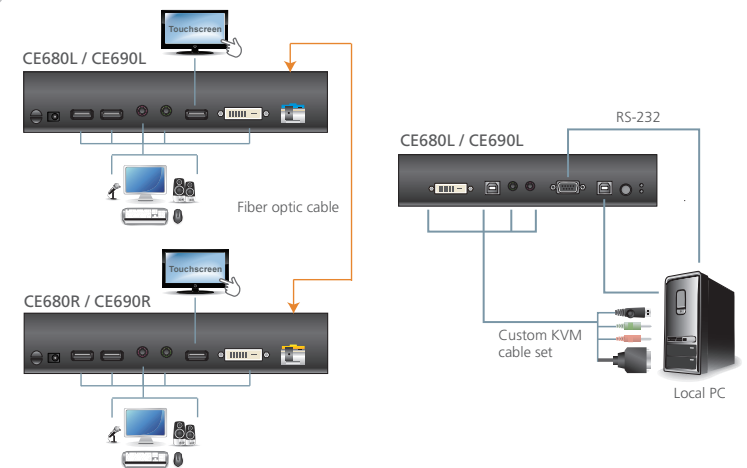

Specifications

Function		CE680L/CE690L	CE680R/CE690R	
Connectors	KVM Ports	Video	1 x DVI-D Female (White)	N/A
		Speaker	1 x Mini Stereo Jack Female (Green)	N/A
		Mic.	1 x Mini Stereo Jack Female (Pink)	N/A
		USB (KB / Mouse)	1 x USB Type B Female (White)	N/A
		USB (Touch Panel)	1 x USB Type B Female (White)	N/A
Connectors	Console Ports	Keyboard	1 x USB Type A Female (White)	
		Video	1 x DVI-D Female (White)	
		Mouse	1 x USB Type A Female (White)	
		Speaker	1 x Mini Stereo Jack Female (Green)	
		Mic.	1 x Mini Stereo Jack Female (Pink)	
		USB (Touch Panel)	1 x USB Type A Female (White)	
RS-232		1 x DB-9 Female (Black)	1 x DB-9 Male (Black)	
Power		1 x DC Jack (Black)		
Optical In/Out		1 x Bi-directional SFP (LC) *		
LEDs	Local	1 (Green)	N/A	
	Remote	1 (Green)	1 (Green)	
	Link	N/A	1 (Green)	
Switches	Operation Mode Selection	1 x Pushbutton		
	Wakeup PC	N/A	1 x Pushbutton	
Fiber Optics	Operating Distance**	600m (CE680) / 20km (CE690) with (SM) fiber		
	Wavelength	1310 / 1550 nm for SM		
	Data Rate	Single fiber: 3.125 Gbps		
Power Consumption		DC 5.3 V, 10.2 W	DC 5.3 V, 9.0 W	
Environment	Operating Temperature	0° to 50° C		
	Storage Temperature	-20° to 60° C		
	Humidity	0 - 80% RH, Non-condensing		
Physical Properties	Housing	Metal		
	Weight	1.10 kg	1.08 kg	
	Dimensions (LxWxH)	21.50 x 16.29 x 4.18 cm	21.50 x 16.29 x 4.18 cm	

Note: * The optical fiber modules are color-coded accordingly:
 • CE680L - Blue • CE680R - Yellow • CE690L - Purple • CE690R - White
 **1. Operating distance is approximate. A typical maximum distance may vary depending on factors such as fiber type, bandwidth, connector splicing, losses, modal or chromatic dispersion, environmental factors, and kinks.
 2. It is recommended that you use a Single Mode optical fiber cable that conforms to IEC 60793-2-50 B1.1 or ITU-T G.652.B specifications.
 3. The CE680/CE690 supports OM3 optical fiber which can extend the transmission distance up to 300 meters.



Features

- Allows access to a computer or KVM installation from a local / remote console
- Supports DVI-D interface and allows transmission of DVI single-link signals
- Superior video quality of up to 1920 x 1200 @ 60 Hz (24-bit) - receive an excellent, crisp image on your screen over long distances (CE680: up to 600 m, CE690: up to 20 km)
- Touchscreen support - connect a generic touchscreen, including up to 10-point multi-touch devices, to accommodate highly interactive applications (no extra drivers needed)
- Dual console operation - control your system from both the local and remote USB keyboard, monitor and mouse consoles
- Uses one fiber optic cable to connect the local and remote units
- HDCP-compatible
- RS-232 serial port—connect to a serial terminal or serial devices such as barcode scanners (baud rate: 115200 bps)
- PC Wakeup support—use a pushbutton on a Remote Unit to wake a PC at the local site via RS-232
- Audio-enabled - supports stereo speakers and microphone
- Rack-mountable

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Publish Date: 09/2016 V4.0



© Copyright 2016 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.