

ATEN Control System

VK108US 8-button Keypad (US, 1 Gang)

- The VK108US is a fully-customizable 8-button keypad designed for use with the ATEN Control System. The keypad provides an interface to control devices in a room from a standard wall mounted faceplate. Created with flexibility in mind, the one-gang keypad can be laid out in 14 different combinations of 4 to 8 buttons that snap together as easy as Lego's. By connecting to the VK2100/VK1100 Control Box over a LAN, users will find it's effortless using VK6000 software to configure the desired control of any connected device from the keypad. With the button's ready to go, you have instant and smart control of the facilities from a keypad or keypads that can manage any device in the room. The VK108US is an affordable solution, perfect to serve as the primary interface in small meeting rooms, or as secondary device control in classrooms and conference centers.



Note: This model is also available in black color – Part number: VK108US1, which is a built-to-order product. To place an order, please contact your regional ATEN representative.



Custom button placement on the keypad can be set in 14 different combinations of 4 to 8 buttons. The example above shows the 10 most commonly used.

Features


- Key pad – provides physical connection to the ATEN Control System
- Fully customizable with 14 layout combinations of 4 to 8 buttons
- Available in black or white color
- System LED indicators for quick connection status check
- Dual-color button LEDs for clear indication and visibility in dark environments
- Easy ID pairing with Control Box for Ethernet communication
- Up to 8 keypads connect to a single Control Box for future scalability
- Versatile modes support flexible behavior settings for each button
- Intuitive web GUI for easy keypad configuration
- Redundant power supplies with Power over Ethernet (PoE) and DC power
- Button engraving service

Highlights


Fully Customizable with Ease	<p>The VK108US's customizability allows system integrators to fulfill diverse applications with ease. The hardware supports two button sizes that can form 14 layout combinations of 4 to 8 buttons, while the VK6000 software provides versatile modes for each button: normal, toggle, press and release, and long press. The keypad mode and status can be synchronized with other keypads on the same network. Furthermore, the swappable buttons allow the keypad layout to be changed even when it's online and mounted to the wall. This superior flexibility facilitates system integrators who need to quickly answer to customer requirements and changes that are demanded.</p>
Single Cable Installation	<p>The VK108US's LAN port supports Power over Ethernet (PoE) that allows both data and electric power to be transmitted over one single Ethernet cable, eliminating the need of an extra power source and extra wiring. For applications that require a direct electrical supply, the VK108US can also be powered via a 5 VDC power adapter.</p>
IP-free Configuration	<p>Ethernet-based solutions normally involve configuring complicated IP and network settings before you can access a device. With our ID concept implemented into ATEN products, all IP and network settings are auto-configured for the VK108US and other ATEN Control Box peripherals (sold separately). Simply pair the ID number of the keypad with the ID number of the Control Box and the network setting is completed!</p>

Installation Setup


Set Keypad Layout

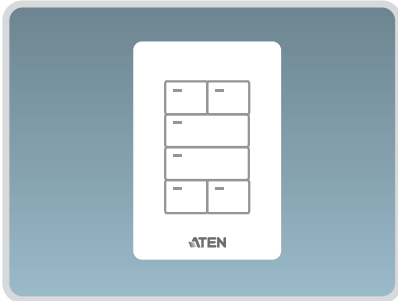

Pair with Control Box

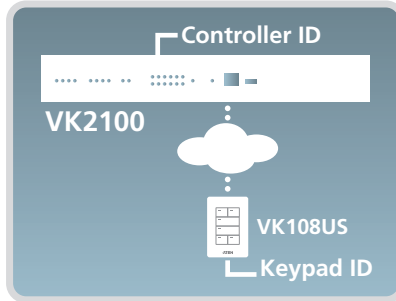

Configure Settings

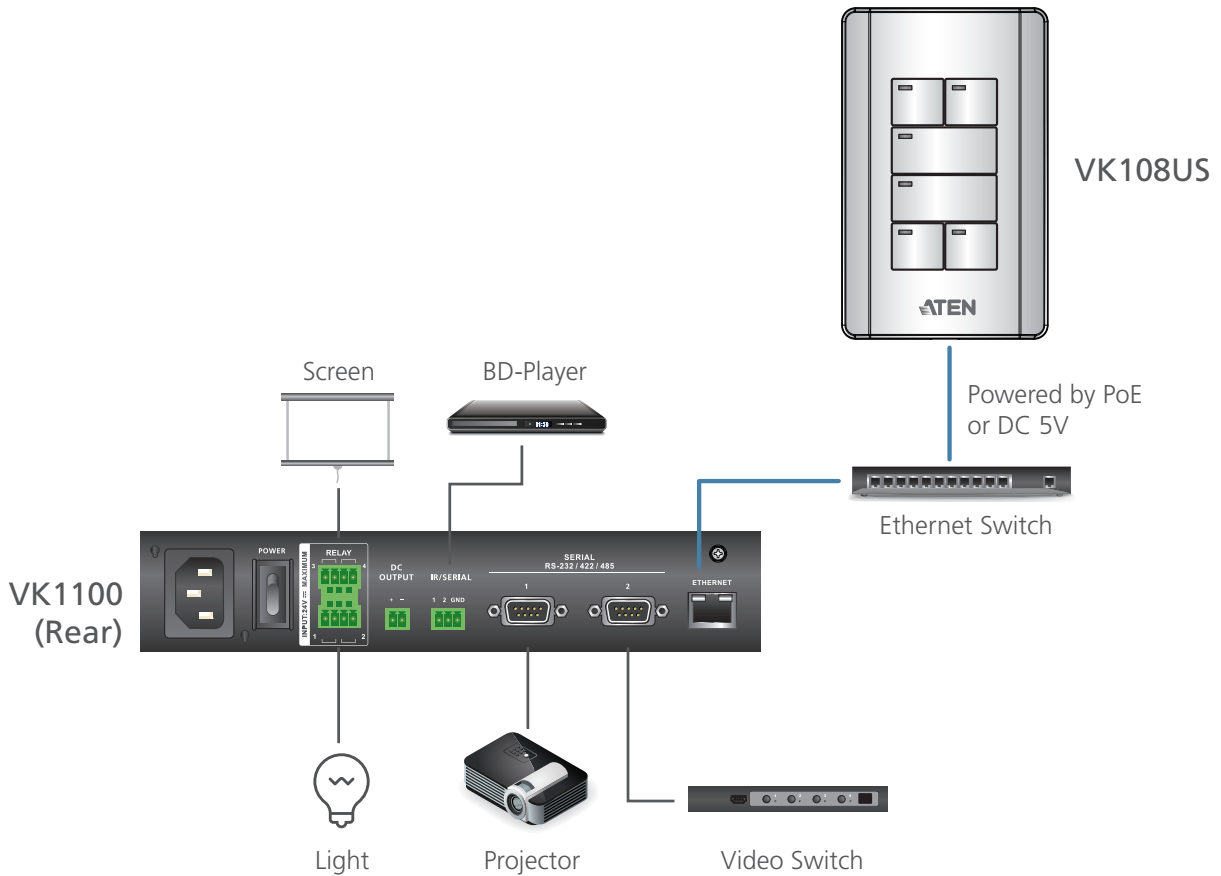

Specifications

Function	VK108US
Interfaces	
Ethernet	<ul style="list-style-type: none"> • 1 x RJ-45 Female, 10/100Base-T • Supported Protocol: ICMP, TCP/IP, DHCP, HTTPS • DHCP-enabled. The following default IP settings will be used if no IP is assigned within 30 seconds: IP: 192.168.0.60 Subnet Mask: 255.255.255.0
Keypad Layout	4~8 buttons customizable in 14 keypad layouts
Switches	
Controller ID	1 x 16-segment Switch
Keypad ID	1 x 8-segment Switch
Reset Button	1 x Semi-recessed Pushbutton
Power	
Consumption	DC5V: 1.25W (adapter); DC48V: 1.58W (PoE, PoE 802.3 AF/AT compatibility)
Environmental	
Operating Temperature	0° to 50° C
Storage Temperature	-20° to 60° C
Humidity	0 - 80% RH, Non-Condensing
Physical Properties	
Housing	Plastic
Weight	0.15 kg
Dimensions (L x W x H)	11.63 x 7.06 x 4.80 cm
Faceplate Dimensions (W x H x D)	7.42 x 11.92 x 0.92 cm

Product information is subject to change without prior notice.

ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datong Rd., Sijhih District., New Taipei City 221, Taiwan
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767
 www.aten.com E-mail: marketing@aten.com

Publish Date: 07/2020 V3.0



© Copyright 2020 ATEN® International Co., Ltd.
 ATEN and the ATEN logo are trademarks of ATEN International Co., Ltd.
 All rights reserved. All other trademarks are the property of their respective owners.