

TN-5516A/5518A Series Hardware Installation Guide

Moxa ToughNet Switch

Third Edition, March 2015

MOXA[®]

© 2015 Moxa Inc. All rights reserved.

P/N: 1802055160022



Overview

The ToughNet TN-5516A/5518A series M12 managed Ethernet switches are designed for industrial applications in harsh environments. The TN series switches use M12 connectors to ensure tight, robust connections, and guarantee reliable operation against environmental disturbances, such as vibration and shock. The wide 24 to 110 VDC with dual power input (non-PoE series) increases the reliability of your communications.

The TN-5516A series includes PoE and non-PoE switches.

- TN-5516A series: 16 Fast Ethernet M12 ports.
- TN-5516A-8PoE series: 8 Fast Ethernet and 8 PoE Fast Ethernet M12 ports.

The TN-5518A series also includes PoE and non-PoE switches.

- TN-5518A series: 16 Fast Ethernet M12 ports, supports additional 2 Gigabit ports located on the bottom of the unit, with or without bypass function.
- TN-5518A-8PoE series: 8 Fast Ethernet and 8 PoE Fast Ethernet M12 ports, supports additional 2 Gigabit ports located on the bottom of the unit, with or without bypass function.

The -40 to 75°C operating temperature and IP54 rated waterproof enclosure allow deployment in harsh environments. The TN-5516A/5518A series Ethernet switches are compliant with EN 50155/50121-3-2/50121-4 (railway applications) requirements, covering operating temperature, power input voltage, surge, ESD, and vibration, making the switches suitable for a variety of industrial applications

Package Checklist

Your ToughNet TN-5516A/5518A switch is shipped with the following items. If any of these items are missing or damaged, please contact your customer service representative for assistance.

- 1 Moxa ToughNet switch
- M12 to DB9 console port cable
- 2 protective caps for console and relay output ports
- Panel mounting kit
- CD-ROM with user's manual, Windows utility, and SNMP MIB file
- Hardware installation guide
- Warranty card

Features

Anti-Vibration Circular Connectors for Robust Links

- M12 D-coding 4-pin female connectors for Fast Ethernet 10/100BaseT(X) ports
- M12 X-coded 8-pin female connectors for Gigabit Ethernet 10/100/1000BaseT(X) ports
- M12 A-coding 5-pin male connectors for console and relay output
- M23 6-pin male connectors for power input

Isolated Power Inputs

- Supports 24 to 110 VDC (16.8 to 137.5 VDC)

High Performance Network Switching Technology

- IPv6 ready, certified by the IPv6 Logo Committee
- IEEE 1588 PTP (Precision Time Protocol) for the precise time synchronization of networks
- DHCP Option 82 for IP address assignment with different policies
- EtherNet/IP and Modbus/TCP industrial Ethernet protocols supported
- Turbo Ring and Turbo Chain (recovery time <20 ms @250 switches),and STP/RSTP/MSTP for network redundancy
- IGMP Snooping and GMRP for filtering multicast traffic from industrial Ethernet protocols
- Port-based VLAN, IEEE802.1Q VLAN, and GVRP protocol to ease network planning
- QoS (IEEE 802.1p/1Q and ToS/DiffServ) allows real-time traffic classification and prioritization
- 802.3ad, LACP for optimum bandwidth utilization
- TACACS+, SNMPv3, IEEE 802.1X, HTTPS, and SSH to enhance network security
- SNMP v1/v2c/v3 for different levels of network management
- RMON for efficient network monitoring and proactive capability
- Bandwidth management prevents unpredictable network status
- Lock port allows access by only authorized MAC addresses
- Port mirroring for online debugging
- Automatic warning by exception through email, relay output
- Automatic recovery of connected devices' IP addresses
- Line-swap fast recovery
- LLDP for automatic topology discovery through network management software
- Loop protection prevents network loops
- Configurable through Web browser, Telnet/Serial console, CLI, and Windows utility



Designed for Industry-Specific Applications

- Two Gigabit Ethernet ports to meet high bandwidth requirements.
- Bypass relay option on the 2 Gigabit Ethernet ports ensures non-stop data communication in the event a switch stops working due to a power failure.
- EN 50155/50121-3-2/50121-4 compliant
- -40 to 75°C operating temperature range
- IP54 rugged high-strength case
- Panel mounting or DIN rail mounting installation capability


Recommended Optional Accessories

- CBL-M23(FF6P)Open-BK-100-IP67: 1-meter M23 to 6-pin power cable with IP67-rated female 6-pin M23 connector
- CBL-M12D(MM4P)/RJ45-100 IP67: 1-meter M12-to-RJ45 Cat-5E UTP Ethernet cable with IP67-rated male 4-pin M12 D-coded connector
- CBL-M12(FF5P)/OPEN-100 IP67: 1-meter M12-to-5-pin power cable with IP67-rated female 5-pin M12 A-coded connector
- M12D-4P-IP68: Field-installable M12 D-coded screw-type connector, male 4-pin, IP68-rated
- M12A-5P-IP68: Field-installable M12 A-coded screw-type connector, female 5-pin, IP68-rated
- CAP-M12F-M: Metal cap for M12 female connector
- DK-DC50131: DIN rail mounting kit, 50 x 131 mm

TN-5516A/5518A Panel Layouts

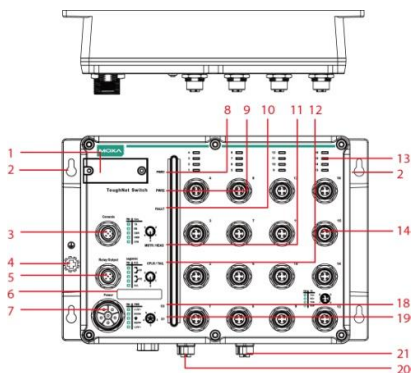


Bottom View

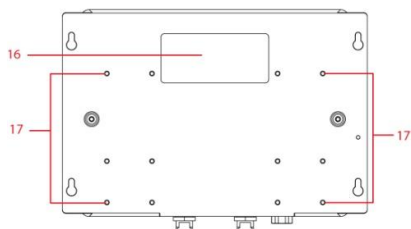

Rear View

1. Model name
2. Screw holes for panel mounting kit
3. Console port
4. Grounding screw
5. Relay output port
6. Power input voltage range indicator
7. Power input port (male 5-pin shielded M23 connector)
8. PWR1 LED: for power input 1
9. PWR2 LED: for power input 2
10. FAULT LED
11. MSTR/HEAD LED: for ring master or chain head
12. CPLR/TAIL LED: for ring coupler or chain tail
13. TP port's 10/100 Mbps LED
14. 10/100BaseT(X) port (M12 D-coded 4-pin female connector)
15. Waterproof vent
16. Product label
17. 12 screw holes for DIN rail mounting kit
18. E2 LED: Not used by the TN-5516A series
19. E1 LED: Not used by the TN-5516A series
20. Gigabit Ethernet port E1 (corresponds to port 17 in the TN-5518A User's Manual)
21. Gigabit Ethernet port E2 (corresponds to port 18 in the TN-5518A User's Manual)

TN-5516A-8PoE/5518A-PoE Panel Layouts

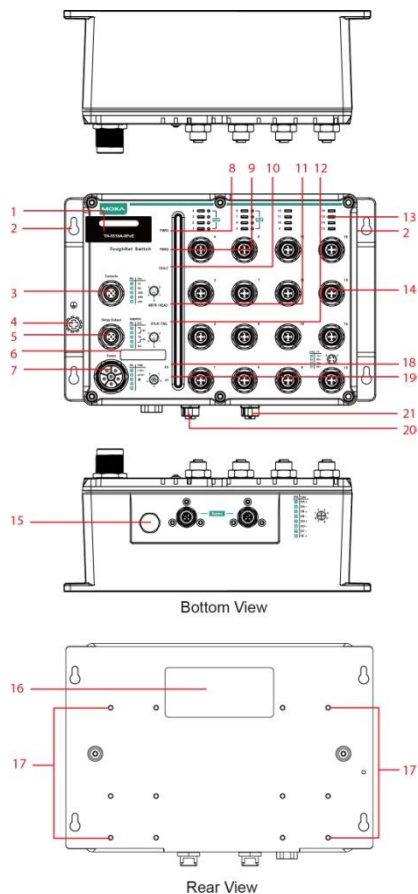

1. Model name
2. Screw holes for panel mounting kit
3. Console port
4. Grounding screw
5. Relay output port
6. Power input voltage range indicator
7. Power input port (male 5-pin shielded M23 connector)
8. PWR1 LED: for power input 1
9. PWR2 LED: for power input 2
10. FAULT LED
11. MSTR/HEAD LED: for ring master or chain head
12. CPLR/TAIL LED: for ring coupler or chain tail
13. TP port's 10/100 Mbps LED
14. 10/100BaseT(X) port (M12 D-coded 4-pin female connector)
15. Waterproof vent
16. Product label
17. 12 screw holes for DIN rail mounting kit
18. E2 LED: Down-side E2 Gigabit port's 10/100/1000 Mbps LED
19. E1 LED: Down-side E1 Gigabit port's 10/100/1000 Mbps LED
20. Gigabit Ethernet port E1 (corresponding to port 17 in the TN-5518A User's Manual)
21. Gigabit Ethernet port E2 (corresponding to port 18 in the TN-5518A User's Manual)




ATTENTION


DO NOT open or remove the vent (#15). Once the seal has been removed, the warranty becomes invalid. Exposed connectors (including 3, 5, and 14) when not in use must be tightly covered with protective caps (an optional accessory) to ensure IP54-rated protection.

Mounting Dimensions (unit = mm)


TN-5516A Series

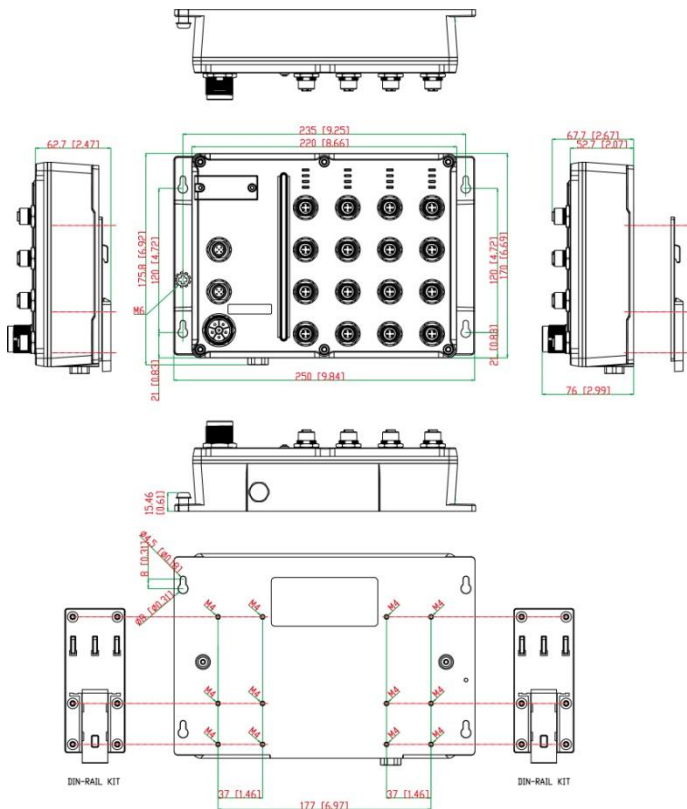


TN-5516A-8PoE Series

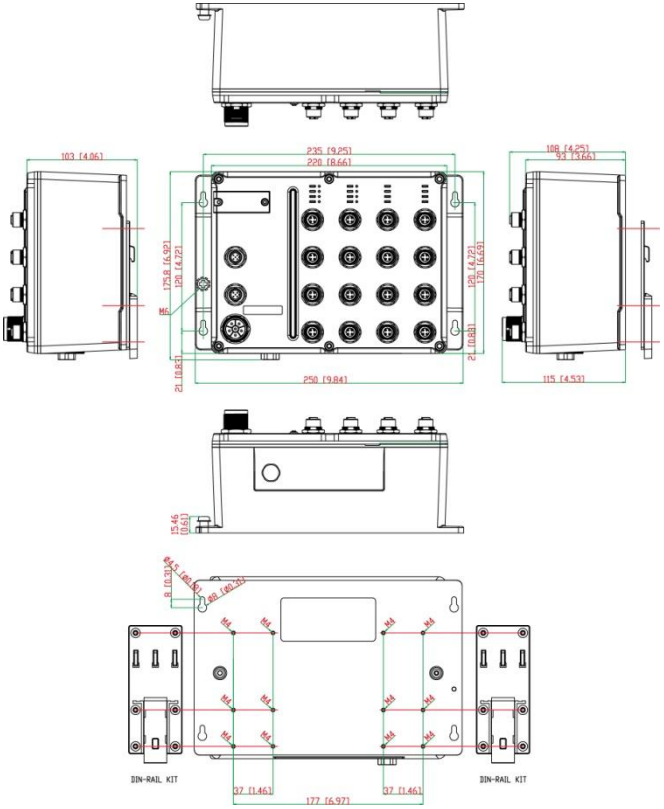

TN-5518A Series

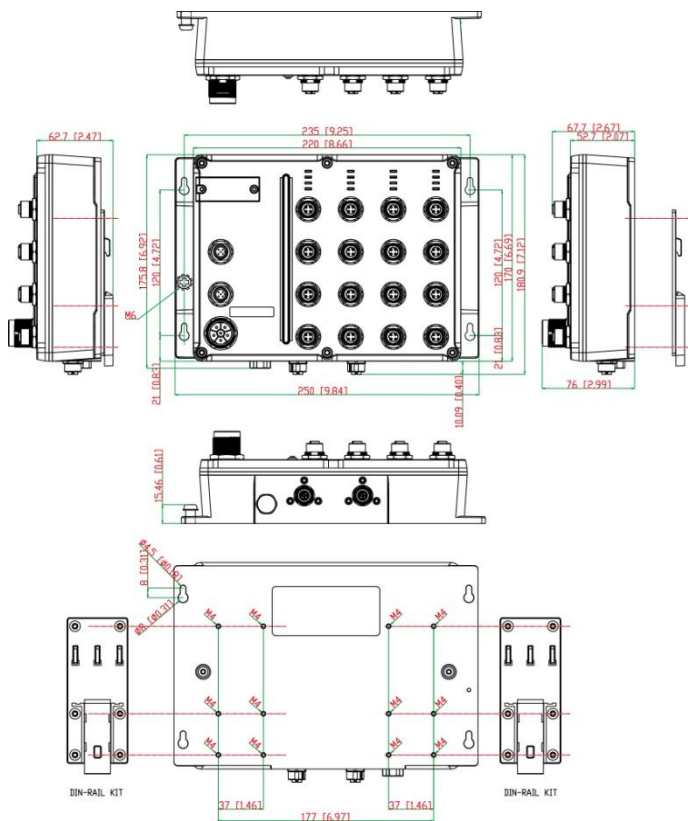

TN-5518A-8PoE

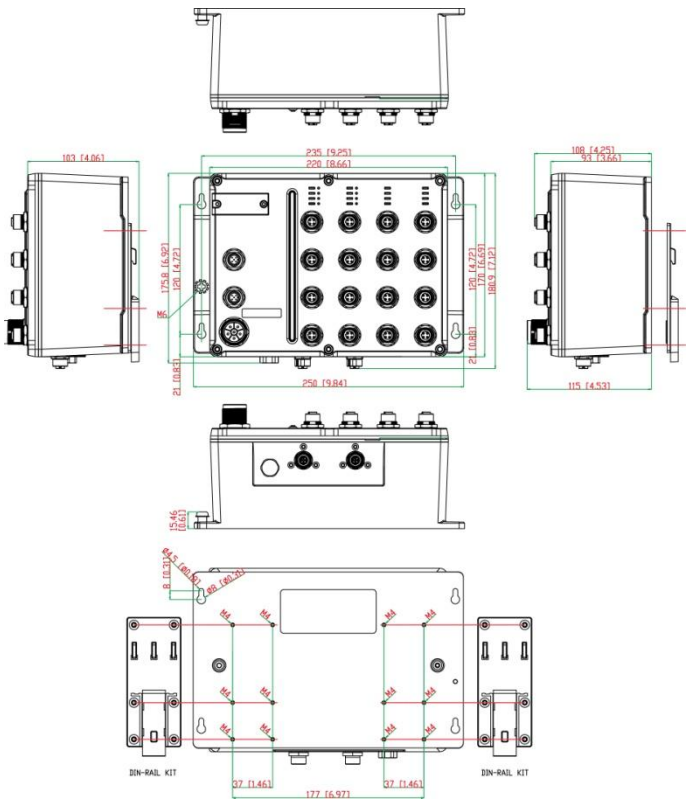


Panel/Wall Mounting

STEP 1:

Mounting the TN-5516A/5518A to a wall requires 4 screws. Use the ToughNet switch as a guide to mark the correct positions of the 4 screws.

STEP 2:

Use the 4 screws in the panel mounting kit. If you would like to use your own screws, make sure the screw head is **between 6.0 mm and 7.0 mm** in diameter and the shaft is less than **4.0 mm** in diameter, as shown at the right.




Do not screw the screws in all the way—leave a space of about 2 mm to allow room for sliding the ToughNet switch between the wall and the screws.

NOTE Before tightening the screws into the wall, make sure the screw head and shaft size are suitable by inserting the screw through one of the keyhole-shaped apertures of the ToughNet switch.

STEP 3:

Once the screws are fixed in the wall, hang the ToughNet switch on the 4 screws through the large opening of the keyhole-shaped apertures, and then slide the switch downwards. Tighten the four screws for added stability.

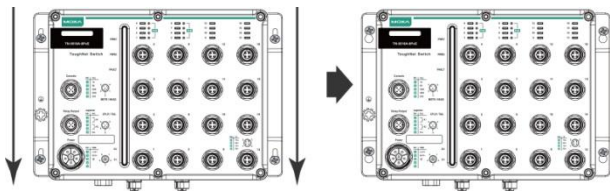


NOTE To provide greater protection from vibration and shock, use screws with shaft diameter between 6.0 mm and 7.0 mm, and fix the ToughNet switch onto the wall directly through the large opening of the keyhole-shaped apertures.

DIN Rail Mounting (optional)

You can use the optional DIN rail mounting kit DK-DC50131 (must be purchased separately) to mount the TN-5516A/5518A on a 35 mm DIN rail.

STEP 1:

Use 12 screws (6 screws per plate) to attach the two DIN rail attachment plates to the rear panel of the switch.




STEP 2:

If the spring-loaded bracket is locked in place, push the recessed button to release it. Once released, you should feel some resistance from the spring as you slide the bracket up and down a few millimeters in each direction.


STEP 3:

Position the ToughNet switch on the DIN rail, tilting to hook clamps over the top edge of the rail.




STEP 4:

Swing the switch down fully onto the DIN rail until both clamps completely latch.



To remove the Moxa ToughNet Switch from the DIN rail use a screwdriver to pull out the two spring-loaded brackets from the bottom until they are fixed in the "locked" position. Then reverse Steps 3 and 4 above.



Wiring Requirements



WARNING

Turn the power off before disconnecting modules or wires. The correct power supply voltage is listed on the product label. Check the voltage of your power source to make sure you are using the correct voltage. Do NOT use a voltage greater than what is specified on the product label.

These devices must be supplied by a SELV source as defined in the Low Voltage Directive 2006/95/EC and 2004/108/EC.



ATTENTION

Safety First!

Be sure to disconnect the power cord before installing and/or wiring your Moxa switch.

This device has UL508 approval. Use copper conductors only, 75°C, and tighten to 4.5 pound-inches. For use in pollution degree 2 environments.



ATTENTION

Safety First!


Observe all electrical codes dictating the maximum current allowable for each wire size. If the current goes above the maximum ratings, the wiring could overheat, causing serious damage to your equipment.

Please read and follow these guidelines:

- Use separate paths to route wiring for power and devices. If power wiring and device wiring paths must cross, make sure the wires are perpendicular at the intersection point.
NOTE: Do not run signal or communications wiring and power wiring through the same wire conduit. To avoid interference, wires with different signal characteristics should be routed separately.
- You can use the type of signal transmitted through a wire to determine which wires should be kept separate. The rule of thumb is that wiring that shares similar electrical characteristics can be bundled together.
- Keep input wiring and output wiring separated.
- It is strongly advised that you label wiring for all devices in the system when necessary.

Grounding the ToughNet Switch

Grounding and wire routing help limit the effects of noise due to electromagnetic interference (EMI). Run the ground connection from the grounding screw to the grounding surface prior to connecting devices.

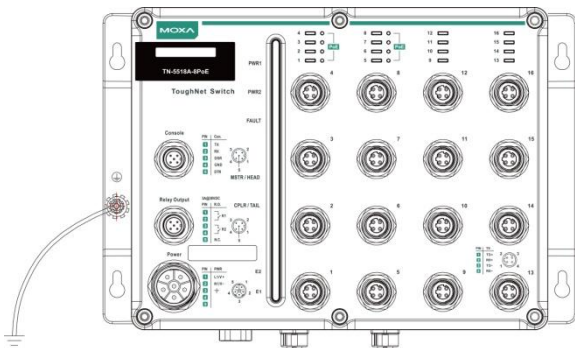

ATTENTION


This product is intended to be mounted to a well-grounded mounting surface such as a metal panel.

Connecting the Power Supplies

In non-PoE switches, the ToughNet TN-5516A/5518A series switches support two sets of power input—power input 1 and power input 2. The M23 6-pin male connector on the TN-5516A/5518A non-PoE switches' front panel is used for the dual power inputs.


Pinouts for the power input port on the TN-5516A/5518A (non-PoE series)

| PIN | PWR |
|-----|-------|
| 1 | L1/V+ |
| 2 | N1/V- |
| 3 | ⏏ |
| 4 | N2/V- |
| 5 | L2/V+ |



Pinouts for the power input port on the TN-5516A/5518A-PoE series

| PIN | PWR |
|-----|-------|
| 1 | L1/V+ |
| 2 | N1/V- |
| 3 | ⏏ |
| 4 | |
| 5 | |



| Pin | Description | Usage |
|-----|---------------------|---|
| 1 | PWR1 Live / DC + | Connect "PWR1 Live / DC +" to the positive (+) terminal when using a DC power source. |
| 2 | PWR1 Neutral / DC - | Connect "PWR1 Neutral / DC -" to the negative (-) terminal when using a DC power source. The negative input for the two power supplies are N1/V- and N2/V-. |
| 3 | Chassis Ground | Connect the "Chassis Ground" to the equipment ground bus for DC inputs. |
| 4 | PWR2 Neutral / DC - | Connect "PWR2 Neutral / DC -" to the negative (-) terminal when using a DC power source. The negative input for the two power supplies are N1/V- and N2/V-. |
| 5 | PWR2 Live / DC + | Connect "PWR2 Live / DC +" to the positive (+) terminal when using a DC power source. |

STEP 1:

Plug your power cord connector into the power input port of the TN-5516A/5518A switch.

STEP 2:

Screw the nut on your power cord connector into the power input connector on the switch to ensure a tight connection.



ATTENTION

Before connecting the TN-5516A/5518A to the power input, make sure the power source voltage is stable.



ATTENTION

Do not power on the TN-5516/5518A before connecting the M23 connector.

Connecting the Relay Outputs

Each TN-5516A/5518A switch has two sets of relay outputs—relay output 1 and relay output 2. The M12 A-coded 5-pin male connector on the TN-5516A/5518A's front panel is used for the two relay outputs. Use a power cord with an M12 A-coded 5-pin female connector to connect the relay contacts. You can purchase an M12 power cable from Moxa; the model number is CBL-M12 (FF5P)/OPEN-100 IP67.

Pinouts for the relay output port on the TN-5516A/5518A

| PIN | R.O. |
|-----|------|
| 1 | R1 |
| 2 | |
| 3 | R2 |
| 4 | |
| 5 | N.C. |

N.C.: Not connected

FAULT:

The two sets of relay contacts of the M12 A-coded 5-pin male connector are used to detect user-configured events. The two wires attached to the fault contacts form an open circuit when a user-configured event is triggered. If a user-configured event does not occur, the fault circuit remains closed.

Connecting the Data Lines

10/100BaseT(X) Ethernet Port Connection

All TN-5516A/5518A models have 16 10/100BaseT(X) Ethernet ports (M12 D-coded 4-pin female connector). The 10/100TX ports located on the TN-5516A/5518A front panel are used to connect to Ethernet-enabled devices. Most users configure these ports for Auto MDI/MDI-X mode, in which case the port's pinouts are adjusted automatically depending on the type of Ethernet cable used (straight-through or cross-over), and the type of device (NIC-type or HUB/Switch-type) connected to the port.

In what follows, we give pinouts for both MDI (NIC-type) ports and MDI-X (HUB/Switch-type) ports. We also give cable wiring diagrams for straight-through and cross-over Ethernet cables.

Pinouts for the 10/100BaseT(X) Ports on the TN-5516A/5518A

| PIN | TX |
|-----|-----|
| 1 | TD+ |
| 2 | RD+ |
| 3 | TD- |
| 4 | RD- |


Housing: shield

Pinouts for the 10/100/1000BaseT(X) M12 (8-pin) Port


| PIN | Con. |
|-----|------|
| 1 | DA+ |
| 2 | DA- |
| 3 | DB+ |
| 4 | DB- |
| 5 | DD+ |
| 6 | DD- |
| 7 | DC- |
| 8 | DC+ |




M12 (4-pin, M) to M12 (4-pin, M) Cross-Over Cable Wiring

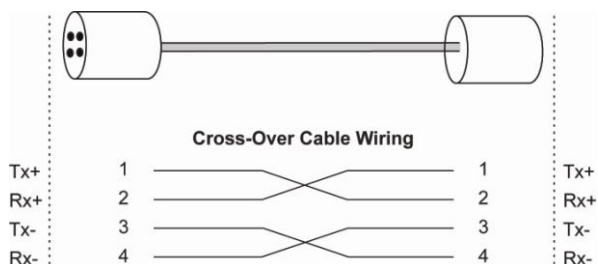


M12 (4-pin, M) to M12 (4-pin, M) Straight-Trough Cable Wiring

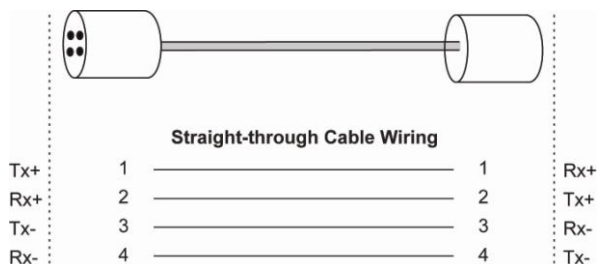

M12 (4-pin, M) to RJ45 (8-pin) Cross-Over Cable Wiring

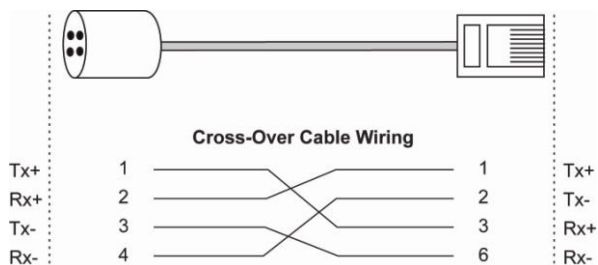

M12 (4-pin, M) to RJ45 (8-pin) Straight-Trough Cable Wiring

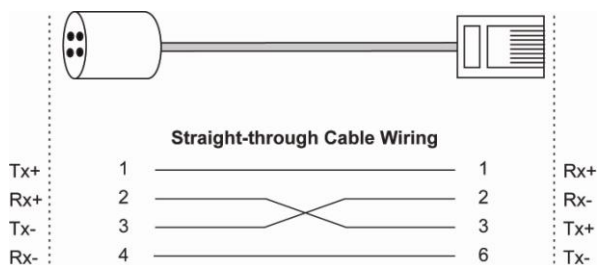

ATTENTION


The protective cover must be fixed properly to ensure IP54 protection. Use a torque wrench set to a torque of 4 kgf-m when tightening the screws. Note that applying a larger torque may damage the plastic protective cover.

Bypass Relay Function

The 2 Gigabit Ethernet ports on the TN-5518A-2GTXPB and TN-5518A-8PoE-2GTXPB are equipped with a bypass relay function. When the switch is operating normally, these two Gigabit ports work in the same way as the other ports. That is, frame ingressions are processed and then forwarded. In the event the switch stops working due to a power failure, the bypass relay function will be triggered to ensure non-stop data communication.

The figure below illustrates the bypass relay function. For example, if Switch B loses power, then the two Gigabit ports will be bypassed through the relay circuit and the transmission line from Switch A to B and the transmission line from Switch B to C will interconnect automatically; when done this way, there will be no stoppage.

The bypass relay function helps the network recover from single-node failures in a linear topology.

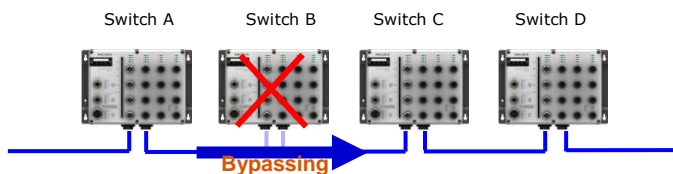

Since the maximum segment length of category 5 twisted-pair cable is 100 meters, cable length must be considered when designing a network that utilizes this function. For example, the total length of the cables from Switch A to B and from B to C must be no more than 100 meters. This way, if the two adjacent nodes (switch B and C for example) encounter a power failure, there will be no stoppage, provided that the total length of the cables A-to-B, B-to-C, and C-to-D are no more than 100 meters.

The bypass relay function works best for networks with linear topologies. ToughNet™ switches with bypass relay function are not recommended to be used in networks that employ ring topologies because network loops

may occur when redundancy protocols such as RSTP or TurboRing™ are applied.

LED Indicators

Several LED indicators are located on the ToughNet switch's front panel. The function of each LED is described in the table below.

| LED | Color | State | Description |
|---------------------|-------|----------|---|
| System LEDs | | | |
| PWR1 | AMBER | ON | Power is being supplied to power input PWR1. |
| | | OFF | Power is not being supplied to power input PWR1. |
| PWR2 | AMBER | ON | Power is being supplied to power input PWR2. |
| | | OFF | Power is not being supplied to power input PWR2. |
| FAULT | RED | ON | When the corresponding PORT alarm is enabled, and a user-configured event is triggered. |
| | | OFF | When the corresponding PORT alarm is enabled and a user-configured event is not triggered, or when the corresponding PORT alarm is disabled. |
| MSTR/ HEAD | GREEN | ON | When the TN switch is either the Master of this Turbo Ring, or the Head of this Turbo Chain. |
| | | Blinking | When the TN switch is Ring Master of this Turbo Ring and the Turbo Ring is broken, or it is Chain Head of this Turbo Chain and the Turbo Chain is broken. |
| | | OFF | When the TN switch is neither the Master of this Turbo Ring, nor the Head of this Turbo Chain. |
| CPLR/ TAIL | GREEN | ON | When the TN switch enables the coupling function to form a back-up path in this Turbo Ring, or it is the Tail of this Turbo Chain. |
| | | Blinking | When Turbo Chain is down. |
| | | OFF | When the TN switch disables the coupling function of Turbo Ring, or it is not the Tail of the Turbo Chain. |
| Port LEDs | | | |
| TP (10/ 100M) | AMBER | ON | TP port's 10 Mbps link is active. |
| | | Blinking | Data is being transmitted at 10 Mbps. |
| | | OFF | TP port's 10 Mbps link is inactive. |
| | GREEN | ON | TP port's 100 Mbps link is active. |
| | | Blinking | Data is being transmitted at 100 Mbps. |
| | | OFF | TP port's 100 Mbps link is inactive. |
| PoE Ports | AMBER | ON | Power is being supplied to a Powered Device (PD) |
| | | OFF | Power is not being supplied to a Powered Device (PD) |

| | | | |
|---------------------------------|-------|----------|--|
| E1/E2 (10/ 100/ 1000M) | AMBER | On | TP port's 10 or 100 Mbps link is active. |
| | | Blinking | Data is being transmitted at 10 or 100 Mbps. |
| | | OFF | TP port's 10 or 100 Mbps link is inactive. |
| | GREEN | ON | TP port's 1000 Mbps link is active. |
| | | Blinking | Data is being transmitted at 1000 Mbps. |
| | | OFF | TP port's 1000 Mbps link is inactive. |

Specifications

| Technology | |
|--------------------------------|--|
| Standards | IEEE 802.3 for 10BaseT IEEE 802.3u for 100BaseT(X) IEEE 802.3ab for 1000BaseT(X) (TN-5518A series only) IEEE 802.3x for Flow Control IEEE 802.1D for Spanning Tree Protocol IEEE 802.1w for Rapid STP IEEE 802.1Q for VLAN Tagging IEEE 802.1s for Multiple Spanning Tree Protocol IEEE 802.1p for Class of Service IEEE 802.1X for Authentication IEEE 802.3ad for Port Trunk with LACP |
| Protocols | IGMP v1/v2 device, GMRP, GVRP, SNMP v1/v2C/v3, DHCP Server/Client, DHCP Option 66/67/82, BootP, TFTP, SNTP, SMTP, RARP, RMON, HTTP, HTTPS, Telnet, SSH, Syslog, LLDP, IEEE 1588 PTP v2, IPv6, NTP Server/Client, EtherNet/IP, Modbus/TCP |
| MIB | MIB-II, Ethernet-like MIB, P-BRIDGE MIB, Q-BRIDGE MIB, Bridge MIB, RSTP MIB, RMON MIB Group 1, 2, 3, 9 |
| Flow Control | IEEE802.3x flow control, back pressure flow control |
| Switch Properties | |
| Priority Queues | 4 |
| Max. Number of Available VLANs | 64 |
| VLAN ID Range | VID 1 to 4094 |
| IGMP Groups | 256 |
| Interface | |
| Fast Ethernet | Front cabling, M12 D-coded 4-pin female connector, 10/100BaseT(X) auto negotiation speed, F/H duplex mode, and auto MDI/MDI-X connection |
| Gigabit Ethernet | Down cabling, M12 X-coded 8-pin female connector, 10/100/1000BaseT(X) auto negotiation speed, F/H duplex mode, auto MDI/MDI-X connection, and bypass relay option |
| Console Port | M12 A-coding 5-pin male connector |
| System LED Indicators | PWR1, PWR2, FAULT, MSTR/HEAD, CPLR/TAIL |
| Port LED Indicators | 10/100M (Fast Ethernet port), 10/100/1000M (Gigabit Ethernet port), PoE |
| Alarm Contact | Two relay outputs in one M12 A-coding 5-pin male connector with current carrying capacity of 1 A @ 30 VDC |

| Power Requirements | |
|--|--|
| Input Voltage | WV: 24-110 VDC (16.8 to 137.5 VDC) |
| Max. Input Current | TN-5516A Series: 0.39 A TN-5518A-2GTX Series: 0.57 A TN-5518A-2GTXBP Series: 0.68 A TN-5516A-8PoE Series: 8.37 A TN-5518A-8PoE Series: 8.52 A TN-5518A-8PoE-2GTXBP Series: 8.66 A |
| Connection | M23 6-pin male connector |
| Overload Current Protection | Present |
| Reverse Polarity Protection | Present |
| Physical Characteristics | |
| Housing | Metal, IP54 protection (with protective caps on unused ports) |
| Dimensions (W × H × D) | TN-5516A Series: 250 x 175.8 x 76 mm (9.84 x 6.92 x 2.99 in) TN-5516A-8PoE Series: 250 x 175.8 x 115 mm (9.84 x 6.92 x 4.53 in) TN-5518A Series: 250 x 180.9 x 76.0 mm (9.84 x 7.12 x 2.99 in) TN-5518A-8PoE Series: 250 x 180.9 x 115 mm (9.84 x 7.12 x 4.53 in) |
| Weight | TN-5516A Series: 2138 g TN-5518A Series: 2250 g TN-5516A-8PoE Series: 3286 g TN-5518A-8PoE Series: 3439 g |
| Installation | Panel mounting, DIN rail mounting (with optional kit) |
| Environmental Limits | |
| Operating Temperature | -40 to 75°C (-40 to 167°F) |
| Storage Temperature | -40 to 85°C (-40 to 185°F) |
| Operating Humidity | 5 to 95% (non-condensing) |
| Regulatory Approvals | |
| Safety | UL508 |
| Rail Traffic | EN50155, EN50121-3-2, EN50121-4 |
| EMI | FCC Part 15, CISPR (EN55022) class A |
| EMS | EN61000-4-2 (ESD), level 3 EN61000-4-3 (RS), level 3 EN61000-4-4 (EFT), level 3 EN61000-4-5 (Surge), level 3 EN61000-4-6 (CS), level 3 EN61000-4-8 |
| Shock | IEC61373 |
| Freefall | IEC60068-2-32 |
| Vibration | IEC61373 |
| Note: Please check Moxa's website for the most up-to-date certification status. | |
| WARRANTY | 5 years Details: See www.moxa.com/warranty |

Technical Support Contact Information
www.moxa.com/support

Moxa Americas:

Toll-free: 1-888-669-2872

Tel: 1-714-528-6777

Fax: 1-714-528-6778

Moxa China (Shanghai office):

Toll-free: 800-820-5036

Tel: +86-21-5258-9955

Fax: +86-21-5258-5505

Moxa Europe:

Tel: +49-89-3 70 03 99-0

Fax: +49-89-3 70 03 99-99

Moxa Asia-Pacific:

Tel: +886-2-8919-1230

Fax: +886-2-8919-1231