

# MT8121X

## X86 CPU Core Touch Panel Computer with 12.1" SVGA TFT Display



### 【Introduction】

MT8000 series is the new HMI generation of Weintek. With the design concept of meeting customers' satisfaction while easy-to-Use attribute as before, a MT8000 not only performs as a Human Machine Interface but also plays as a role of data exchange center. Through the most popular Ethernet connection, data can be shared among MT8000s without limitation and any SCADA/HMI software on the PC can simply access data from MT8000s. MT8000 series is the best choice for your requirement tomorrow.

MT8121X Version 2 supports MPI 187.5K

### Hardware Specification

Display	12.1" TFT
Brightness	400 cd/m <sup>2</sup>
Color	65,536 colors
Contrast Ratio	500:1
Resolution (WxH dots)	800 x 600
Back light	CCFLx2
CCFL life time	50,000 hr. min.
Touch panel	4 wires resistive type
Touch Accuracy	Active Area Length(X)±2%, Width(Y)±2%
Surface Hardness	4H
I/O port	COM1 (RS-232/RS-485 2W/4W), COM2(RS232), COM3(RS-232/RS-485 2W), 1 Ethernet port (10/100 Base-T)
Video Input Port	NTSC/PAL RCA x 2 (Optional) V2 Only
USB Host	2 USB 2.0 Full Speed Host Port
Audio	Audio Line Out x 1, MIC In x 1
Processor	x86 500MHz processor
Storage	256MB D.O.M
DRAM	256MB on board DDR-400MHz SDRAM
SD card slot	Support SDHC/SD
RTC	Built-in (CR2032 3V lithium battery.)


### General Specification

Input Power	24±10% VDC (21.6~26.4VDC) (Power Isolator Inside.)
Power Consumption	1.25 A@24VDC
CE/FCC	Complies with EN 55022: 1998+A1: 2000+A2: 2003 Class A, EN 55024: 1998+A1: 2001+A2: 2003
Voltage resistance	500VAC (1 min.)
Isolation resistance	Exceed 50MΩ at 500VDC
Vibration endurance	10 to 25 Hz (X,Y,Z direction 2G 30minutes)
Protection structure	IP65 front panel (O ring seal)
Storage temperature	-20° ~ 60°C (-4° ~ 140°F)
Operating Temperature	0°~50°C (32° ~ 122°F)
Operation humidity	10-90% RH (non -condensing)
Enclosure	Plastic
Dimensions WxHxD	322 x 243 x 51mm
Panel cutout dimension	305 x 231 mm
Weight	Approx. 2.1 kg

### Operating System

Operating System	EB8000 V4.1.0 or Newer
------------------	------------------------


# Dimensions of MT8121X



Top View



Front View




Side View

## Ordering Information


❑ **MT8121X:** 12.1" TFT LCD HMI, 256MB flash memory/256MB RAM on board.

❑ **MT8121X-VI:** Optional Video Input Port RCA x 2. V2 Only


❑ **RP0006120**  
12.1" Protective Sheet, for MT612T, MT612X, MT8121T, MT8121X. (3 PCS/PKG)

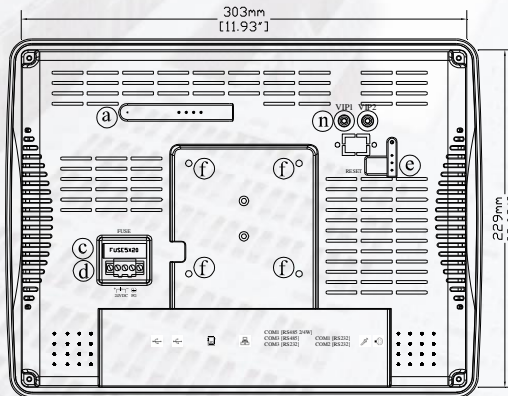

Rear View

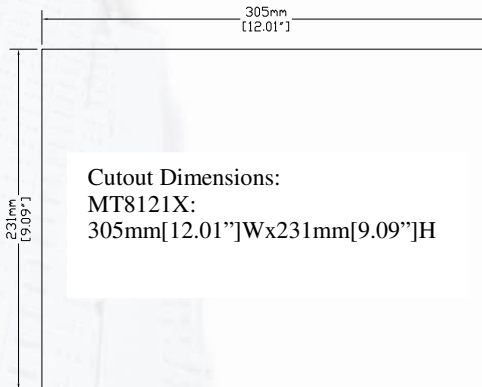

Cutout Dimensions:  
MT8121X:  
305mm[12.01"]Wx231mm[9.09"]H



Panel-mounting clamp slots, 9 places

Bottom View

<b>a</b>	<b>IDE interface (DOM slot)</b>	<b>i</b>	<b>USB Host port x 2</b>
<b>b</b>	<b>Mini USB</b>	<b>j</b>	<b>Ethernet port 10/100 Base-T</b>
<b>c</b>	<b>Fuse</b>	<b>k</b>	<b>Com1 RS485, Com3 RS485, Com3 RS232</b>
<b>d</b>	<b>Power connector</b>	<b>l</b>	<b>Com1 RS232, Com2 RS232</b>
<b>e</b>	<b>Reset button</b>	<b>m</b>	<b>SD CARD SLOT</b>
<b>f</b>	<b>VESA 75mm screw holes</b>	<b>n</b>	<b>Video Input Port x 2 (Optional) V2 Only</b>
<b>g</b>	<b>Mic In</b>		
<b>h</b>	<b>Line Out</b>		