SCM5B39

⊕® (€ **€**x)

Current Output Modules

Description

Each SCM5B39 current output module provides a single channel of analog output. The track-and-hold circuit in the input stage can be operated in a hold mode where one DAC can supply many output modules, or a track mode where one DAC is dedicated to each module. In addition to the track-and-hold circuit, each module provides signal buffering, isolation, filtering, and conversion to a high-level current output (Figure 1).

Setting of the track or hold mode is controlled by the logic state of WR ENI, module pin 23. When pin 23 is low, the track mode is enabled. If pin 23 is high, the hold mode is enabled. The module is designed with a completely isolated computer side circuit which can be floated to $\pm 50 V$ from Power Common, pin 16. This complete isolation means that no connection is required between I/O Common and Power Common for proper operation of the track and hold circuit. For a low state, simply connect pin 23, the Write-Enable pin, to I/O Common, pin 19

The SCMPB02 and SCMPB06 backpanels allow host computer control of the WR EN\ control line, which allows multiplexing of one host DAC to up to 64 SCM5B39 output modules. During power-up, the output remains at 0mA for 100ms on all models except the SCM5B39-07, which allows the track-and-hold circuit to be initialized.

A special circuit in the output stage of the module provides protection against accidental connection of power-line voltages up to 240VAC on all models.

▶ Features

- Accepts High-Level Voltage or Process Current Input
- · Unipolar or Bipolar Current Output
- 1500Vrms Transformer Isolation
- ANSI/IEEE C37.90.1 Transient Protection
- Output Protected to 240VAC Continuous
- 110dB CMR
- 400Hz Signal Bandwidth
- ±0.03% Accuracy
- ±0.005% Linearity
- · CSA C/US Certified, CE and ATEX Compliant
- · Mix and Match SCM5B Types on Backpanel

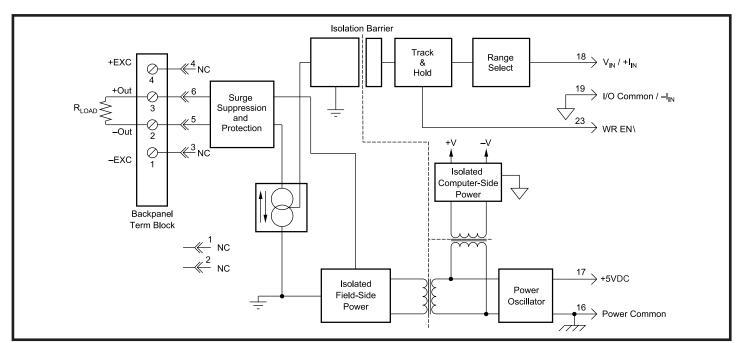


Figure 1: SCM5B39 Block Diagram



Specifications Typical at T_A=+25°C and +5V power

Unipolar Output Current SCM5B39-01,-02,-03,-04,-05	Bipolar Output Current SCM5B39-07
\pm 5V or 0V to +5V 0 to 20mA \pm 36V (no damage) 75mA (no damage) 50M Ω 250 Ω	±10V N/A * N/A 2MΩ N/A
0 to 20mA or 4 to 20mA 100ms 0mA 10% 22VDC 0 to 650Ω (0 to 750Ω for Power Supply Voltage greater than 4.95VDC) 26mA 240Vrms max ΔNSUIFEE C37.90.1	±20mA N/A N/A N/A * ±15VDC 0 to 450Ω (0 to 500Ω for Power Supply Voltage greater than 4.95VDC) * *
1500Vrms max ANSI/IEEE C37.90.1 110dB 80dB per Decade above 400Hz	* * * 80dB per Decade above 275Hz
±0.03% Span ±0.005% Span ±0.5μΑ/°C ±20ppm/°C 10μΑρ-ρ 400Hz 1.0ms	±0.05% Span ±0.03% Span * ±40ppm/°C * 275Hz 1.2ms
40μA/s 50μs	*
+0.8V +2.4V +36V 0.5μA	* * *
+5VDC ±5% 170mA ±0.5µA/% typ	* 130mA *
2.28" x 2.26" x 0.6" (58mm x 57mm x 15mm)	*
-40°C to +85°C -40°C to +85°C 0 to 95% Noncondensing ISM, Group 1 Class A ISM, Group 1 Performance A ±0.5% Span Error Performance B	* * * * * * * *
	## SCM\$B39-01,-02,-03,-04,-05 #5V or 0V to +5V 0 to 20mA #36V (no damage) 75mA (no damage) 50MΩ 250Ω 0 to 20mA or 4 to 20mA 100ms 0mA 10% 22VDC 0 to 650Ω (0 to 750Ω for Power Supply Voltage greater than 4.95VDC) 26mA 240Vrms max ANSI/IEEE C37.90.1 1500Vrms max ANSI/IEEE C37.90.1 110dB 80dB per Decade above 400Hz #0.03% Span #0.005% Span #0.05% Span #0.05% Span #0.5μA/°C #20ppm/°C 10μAp-p 400Hz 1.0ms 40μA/s 50μs +0.8V +2.4V +36V 0.5μA +5VDC ±5% 170mA #0.5μA/% typ 2.28" x 2.26" x 0.6" (58mm x 57mm x 15mm) -40°C to +85°C -40°C to +85°C -40°C to +85°C 0 to 95% Noncondensing ISM, Group 1 Performance A ±0.5% Span Error

Ordering Information

Model	Input Range	Output Range	Bandwidth
SCM5B39-01	0V to +5V	4mA to 20mA	400Hz
SCM5B39-02	-5V to +5V	4mA to 20mA	400Hz
SCM5B39-03	0V to +5V	0mA to 20mA	400Hz
SCM5B39-04	-5V to +5V	0mA to 20mA	400Hz
SCM5B39-05	0mA to 20mA	0mA to 20mA	400Hz
SCM5B39-07	-10V to +10V	-20mA to +20mA	275Hz

Refer to SCM5B392 specifications, p.27, for additional current output models.

NOTES:
* Same as -01, -02, -03, -04, -05 modules.
(1) See Product Description for further details.