




I-8069W-G

8-channel PhotoMOS Relay Output Module

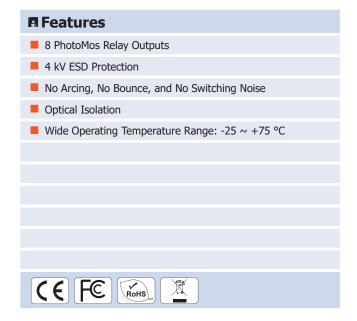

■ Introduction

Both the I-8069W features eight Form A PhotoMOS relay output channels. In comparison to electromechanical relays, the PhotoMOS relays provide a faster response time, greater electrical endurance, higher vibration and shock resistance, and both the I-8069W include eight LED indicators that are used to display channel status as well as providing 4 kV ESD protection.

■ System Specifications


LED Indicators/Display		
System LED Indictors	1 LED as Power Indicator	
I/O LED Indicators	8 LEDs as PhotoMos Relay Output Indicators	
Isolation		
Intra-module Isolation, Field-to-Logic	1500 VDC	
EMS Protection		
ESD (IEC 61000-4-2)	±4 kV Contact for each Terminal	
Power		
Power Consumption	0.6 W max.	
Mechanical		
Dimensions (W x L x H)	30 mm × 115 mm × 102 mm	
Environment		
Operating Temperature	-25 ~ +75 °C	
Storage Temperature	-40 ~ +85 °C	
Humidity	10 ~ 90% RH, Non-condensing	

■ I/O Specifications


Digital Output		
Load Voltage	60 VDC Max. @ DC/AC	
Max. Load Current	60 VDC/1.0 A @ -25 ~ +40 °C 60 VDC/0.8 A @ +40 ~ +60 °C 60 VDC/0.7 A @ +60 ~ +75 °C	
Relay Output		
Channels	8 (Form A)	
Туре	PhotoMOS Relay	
Turn On Time	5.0 ms (Typical)	
Turn Off Time	0.3 ms (Typical)	
Peak Load Current	3 A @ 100 ms	
Output Off State Leakage Current	1 uA	
Output On Resistance	0.15 Ω	

ICP DAS CO., LTD Website: http://www.icpdas.com Vol. 2020.8 1/2

■ Internal I/O Structure

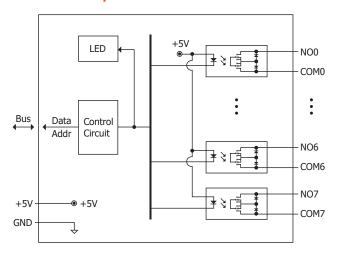


■ Dimensions (Units: mm)

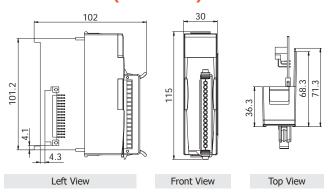

■ Wire Connections

PhotoMOS	ON State	OFF State	
Relay	Readback as 1	Readback as 0	
Relay Output	COMX AC/DC COMX NOX	COMX ACDC X DO Nox	

■ Pin Assignments

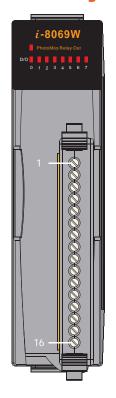

Terminal No.		Pin Assignment
[b	01	NO0
	02	COM0
	03	NO1
	04	COM1
5-0	05	NO2
	06	COM2
	07	NO3
	08	COM3
C D	09	NO4
	10	COM4
	11	NO5
	12	COM5
C m	13	NO6
	14	COM6
	15	NO7
	16	COM7

■ Ordering Information

I-8069W-G CR 8-channel PhotoMOS Relay Output Module (Gray Cover) (RoHS)

ICP DAS CO., LTD Website: http://www.icpdas.com Vol. 2020.8 2/2