



IMB-H810-i2-R11


microATX motherboard supports 22nm LGA1150 Intel® Core™ i7/i5/i3, Pentium®, Celeron® CPU per Intel® H81, DDR3, VGA, Dual GbE, LPT, COM, SATA 6Gb/s, iRIS-2400

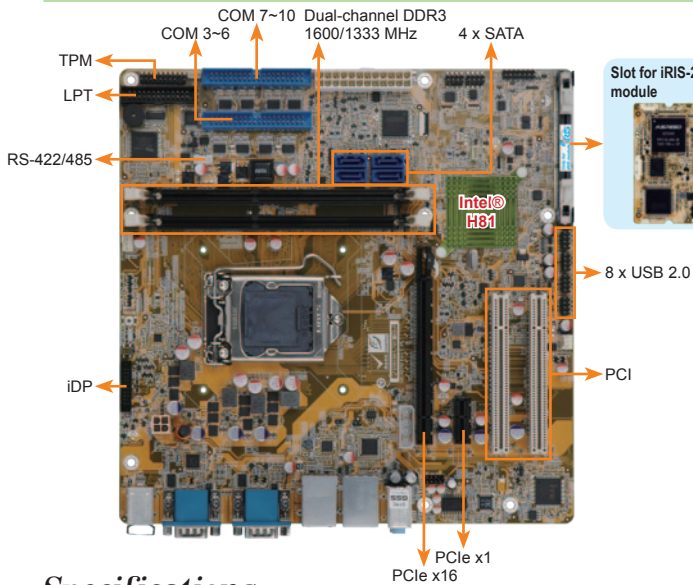

10 COM ports

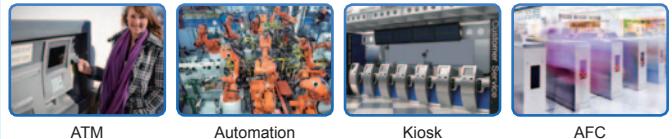


Easy dual display setup

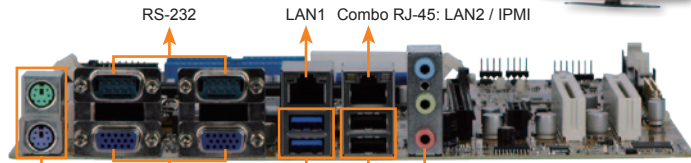

Specifications

- ◆ CPU: LGA1150 Intel® 4th generation Core™ i7/i5/i3, Pentium® or Celeron® processor supported
- ◆ System Chipset: Intel® H81
- ◆ Memory: Two 240-pin 1600/1333MHz dual-channel DDR3 & DDR3L SDRAM unbuffered DIMMs support up to 16GB
- ◆ BIOS: UEFI BIOS
- ◆ Ethernet: LAN1: Intel® I217LM; LAN2: Intel® I210-AT PCIe controller with NCSI support
- ◆ Graphics Engine: Intel® HD Graphics Gen 7.5 supports DX11.1 and OpenCL 1.2, OpenGL 3.2; Full MPEG2, VC1, AVC Decode
- ◆ Display Output: VGA1 (up to 1920x1200 @ 60 Hz); VGA2 (up to 1920x1200 @ 60 Hz); iDP interface for HDMI, LVDS, VGA, DVI, DP (up to 3840x2160 @60 Hz)
- ◆ Super I/O: Fintek F81866
- ◆ Audio: Realtek ALC662 HD Codec supports 5.1 channel Audio Jack (2x5 pin)
- ◆ Audio Jack: Line-in, Line-out (with 3.5W +3.5W audio amplifier), Mic
- ◆ I/O Interface: 1 x LPT; 2 x SATA 3Gb/s; 2 x SATA 6Gb/s; 2 x USB 3.0 (rear IO); 10 x USB 2.0 (2 by rear IO, 8 by pin header); 1 x PS/2 KB/MS; 1 x RS-422/485 by s/w selection (colay COM10); 2 x RS-232 (rear IO); 8 x RS-232 (port 3~6, port 7~10)
- ◆ Front Panel: 1 x Front panel (Power LED, HDD LED, Speaker, Power Button, Reset Button)
- ◆ TPM: 1 x TPM connector (2x10 pin)
- ◆ SMBus: 1 x 4-pin wafer
- ◆ PC: 1 x 4-pin wafer
- ◆ LAN LED: 2 x 2-pin headers for LAN1 Link LED, LAN2 Link LED
- ◆ iRIS Remote Management Module: 1 x iRIS-2400 slot
- ◆ Expansion: 1 x PCIe x16 slot (Gen 3); 1 x PCIe x1 slot; 2 x PCI slot
- ◆ Watchdog Timer: Software programmable, support 1~255 sec system reset
- ◆ Fan Connector: 1 x 4-pin CPU fan connector; 1 x 3-pin system fan connector
- ◆ Power Supply: ATX power supply
- ◆ Power Consumption: 3.3V@0.64A, 5V@4.20A, 12V@0.14A, Vcore_12V@3.88A, 5VSB@0.20A (Intel® Core™ i7-4770K 3.90 GHz CPU with 8GB (2 x 4GB) 1333MHz DDR3 memory)
- ◆ Operating Temperature: -20°C ~ 60°C
- ◆ Storage Temperature: -30°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 244mm x 244mm
- ◆ Weight: GW: 1200g / NW: 680g

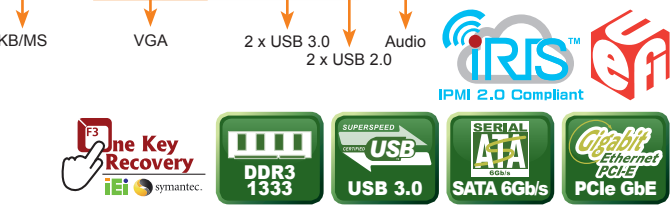

Features

1. LGA1150 Intel® 4th generation Core™ i7/i5/i3, Pentium® or Celeron® processor supported
2. Dual-channel DDR3 1333/1600 MHz support up to 16GB
3. Intel® HD Graphics technology integrates high-performance graphics and media processing
4. Supports legacy PCI 32-bit 33/66MHz
5. Ten COM ports, USB 3.0 and SATA supported
6. TPM V1.2 hardware security function supported by TPM module
7. IEI One Key Recovery solution allows you to create rapid OS backup and recovery
8. Support IPMI 2.0 via iRIS-2400 module
9. IEI jumper-less function

Packing List

1 x IMB-H810-i2 single board computer	
1 x I/O shielding	1 x QIG
2 x SATA cable	1 x Utility CD

Ordering Information

Part No.	Description
IMB-H810-i2-R11	microATX motherboard supports 22nm LGA1150 Intel® Core™ i7/i5/i3/Pentium® and Celeron® CPU per Intel® H81, DDR3, VGA, Dual Intel® PCIe GbE, USB 2.0, PCI, COM, SATA 6Gb/s, LPT, HD Audio, iRIS-2400 and RoHS
iRIS-2400-R10	IPMI 2.0 adapter card with AST2400 BMC chip for DDR3 SO-DIMM socket interface
19800-000049-RS	LPT cable
19800-000051-RS	RS-232 cable, 230mm (P=2.54)
19800-000075-RS	PS/2 KB/MS Y-cable with bracket, 220mm
19800-003100-300-RS	Dual-port USB 2.0 cable with bracket
19800-010500-200-RS	USB 3.0 cable 457mm with bracket
32102-000100-200-RS	SATA power cable, MOLEX 5264-4P to SATA15P
32205-001203-200-RS	RS-232 cable, 40-pin to four DB-9
32205-003800-300-RS	RS-422/485 cable, 200mm
CF-1156A-RS-R11	High performance LGA1155/LGA1156 cooler kit, 1U chassis compatible, 73W
CF-1156E-R11	High performance LGA1155/LGA1156 cooler kit, 95W
DP-DP-R10	DisplayPort to DisplayPort converter board (for IEI iDP connector)
DP-DVI-R10	DisplayPort to DVI-D converter board (for IEI iDP connector)
DP-HDMI-R10	DisplayPort to HDMI converter board (for IEI iDP connector)
DP-LVDS-R10	DisplayPort to 24-bit dual-channel LVDS converter board (for IEI iDP connector)
DP-VGA-R10	DisplayPort to VGA converter board (for IEI iDP connector)
TPM-IN01-R11	20-pin infineon TPM module, software management tool, firmware V3.17