


NANO-9452-R40

EPIC SBC with Intel® Core™ 2 Duo/Core™ Duo/Solo processor, SATA, Dual PCIe GbE, CF Type II, IDE, USB 2.0 & audio

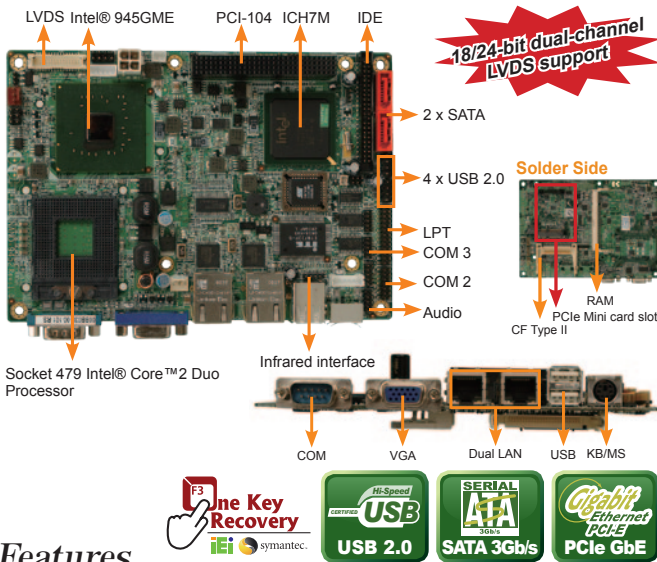

Features

1. Support Intel® Core™ 2 Duo, Core™ Duo/Solo processor with 667 MHz FSB
2. VGA integrated in Intel® 945GME supports 1080i HDTV-out, 18/24-bit dual-channel LVDS
3. DDR2 667/533/400 MHz SO-DIMM socket supports up to 2 GB
4. Dual PCIe Broadcom BCM5787M GbE chipset
5. IEI One Key Recovery solution allows you to create rapid OS backup and recovery

Specifications

- ◆ CPU: Socket M Intel® Core™ 2 Duo, Core™ Duo/Solo processor with a 667MHz FSB; Celeron® M processor with a 533MHz FSB (Yonah Core)
- ◆ System Chipset: Intel® 945GME + ICH7M
- ◆ BIOS: AMI BIOS
- ◆ System Memory: One 200-pin 667/533/400MHz DDR2 SDRAM SO-DIMM supported (system max. 2GB)
- ◆ Ethernet: Dual LAN: Realtek RTL8111E PCIe GbE controller
- ◆ I/O Interface: 6 x USB 2.0, 2 x SATA, 1 x IDE, 3 x RS-232, 1 x RS-232/422/485, 1 x PS/2 for KB/MS, 1 x LPT, 1 x CF Type II
- ◆ Infrared Interface: 1 x Infrared interface by pin header
- ◆ Expansion: 1 x PCI-104 (PCI bus)
- ◆ Super I/O: ITE IT8712F
- ◆ Digital I/O: 8-bit digital I/O, 4-bit input/4-bit output by super I/O
- ◆ Audio: 5.1 channel audio kit with Realtek ALC655 AC'97 codec; 7.1 channel HD Audio kit with Realtek ALC888 codec supports dual audio stream
- ◆ Display Interface: VGA integrated in Intel® 945GME; Support HDTV resolution up to 1080i by component interface; 18/24-bit dual-channel LVDS
- ◆ Watchdog Timer: Software programmable 1-255 sec. by super I/O
- ◆ Power Supply: 12V only AT/ATX support
- ◆ Power Consumption: 12V@2.99A (Intel® Core™ 2 Duo T2500 2.0GHz, 2GB 800 MHz DDR2)
- ◆ Temperature Operating: 0°C ~ 60°C (32°F~140°F); Storage Temperature: -10°C ~ 70°C
- ◆ Humidity Operating: 5% ~ 95%, non-condensing
- ◆ Dimensions: 165 mm x 115 mm

Packing List


1 x NANO-9452 single board computer	
2 x RS-232 cable (P/N: 32200-000049-RS)	
1 x SATA power cable (P/N: 32102-000100-200-RS)	
1 x KB/MS cable (P/N: 32006-000300-100-RS)	1 x One Key Recovery CD
1 x IDE cable (P/N: 32200-000009-RS)	1 x Mini jumper pack
1 x Power cable (P/N: 32100-087100-RS)	1 x Utility CD
2 x SATA cable (P/N: 32000-062800-RS)	1 x QIG

Ordering Information

Part No.	Description
NANO-9452-R40	EPIC SBC, Intel® Core™ 2 Duo, Core Duo/Solo FSB 667MHz with VGA/LVDS/HDTV-out, dual PCIe GbE, SATA and audio
32000-044300-RS	USB cable
19800-004300-100-RS	RS-232/422/485 cable
AC-KIT08R-R10	5.1 channel AC' 97 Audio Kit with Realtek ALC655 codec
AC-KIT-892HD-R10	7.1 channel HD Audio kit with realtek ALC888 codec support dual audio streams
CF-479B-RS	CPU cooler (50 mm x 50 mm x 26 mm, 50W)
32200-015100-RS	LPT cable
32102-022200-100-RS	ATX power cable
32010-000700-100-RS	HDTV out cable

NANO-LX-R12

EPIC SBC with AMD LX800 CPU, Audio, VGA/LVDS, SATA and RAID 0, 1, JBOD Function Support

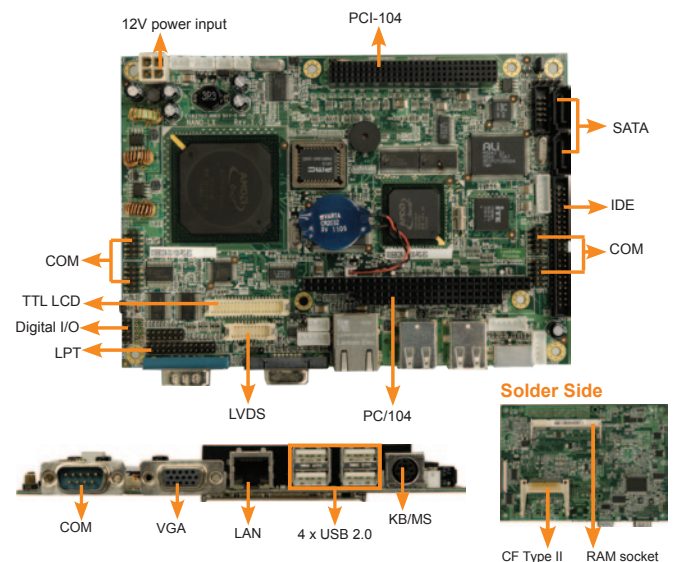

Features

1. EPIC form factor AMD LX800 processor embedded board with RoHS compliant
2. DDR 400MHz SO-DIMM SDRAM up to 1GB
3. VGA, 24-bit TTL, and 18-bit single-channel LVDS
4. SATA RAID 0, 1, JBOD function support
5. Complete I/O support with two SATA, IDE, PC/104-Plus and four USB 2.0
6. IEI One Key Recovery solution allows you to create rapid OS backup and recovery



Specifications

- ◆ CPU: On-board AMD Geode™ LX800 (500MHz) processor
- ◆ System Chipset: AMD Geode LX800 + AMD CS5536
- ◆ BIOS: AWARD
- ◆ System Memory: One 200-pin 400/333MHz DDR SDRAM SO-DIMM Supported (System max. 1GB)
- ◆ Ethernet: LAN: 10/100Mbps Realtek RTL8100C
- ◆ I/O Interface: 4 x USB 2.0, 2 x SATA with VIA VT6421A RAID 0, 1 function support, 1 x CF Type II, 1 x LPT, 6 x RS-232, 1 x RS-422/485, 1 x PS/2 for KB/MS
- ◆ Expansion: 1 x PC/104-Plus
- ◆ Audio: Realtek ALC203 with AC'97 Codec
- ◆ Infrared Interface: 1 x Infrared interface by pin header
- ◆ Digital I/O: 8-bit digital I/O, 4-bit input/4-bit output by super I/O
- ◆ Super I/O: Winbond W83627EHG
- ◆ Display Interface: VGA integrated in AMD LX800; 24-bit single-channel TTL; 18-bit single-channel LVDS
- ◆ Watchdog Timer: Software programmable supports 1-255 sec. system reset
- ◆ Power Supply: 12V only, AT/ATX support
- ◆ Power Consumption: 12V@ 0.92A (AMD LX800 with 400MHz 256MB DDR RAM)
- ◆ Operating Temperature: 0°C ~ 60°C (32°F~140°F)
- ◆ Storage Temperature: -10°C ~ 70°C
- ◆ Operating Humidity: 5% ~ 95%, non-condensing
- ◆ Dimensions: 115 mm x 165 mm
- ◆ Weight: GW: 950 g; NW: 350 g

Packing List

1 x NANO-LX single board computer	
1 x IDE flat cable 44p/44p (P/N: 32200-000009-RS)	
1 x SATA power cable (P/N: 32102-000100-200-RS)	
2 x RS-232 port cable (P/N: 32200-000049-RS)	
1 x KB/MS Y cable (P/N: 32006-000300-100-RS)	1 x One Key Recovery CD
1 x Audio cable (P/N: 32000-072100-RS)	1 x Mini jumper pack
1 x Power cable (P/N: 32100-087100-RS)	1 x Utility CD
2 x SATA cable (P/N: 32000-062800-RS)	1 x QIG

Ordering Information

Part No.	Description
NANO-LX-800-R12	EPIC SBC, AMD LX800 500MHz processor, VGA/LVDS/TTL, LAN, SATA and Audio
32200-015100-RS	LPT cable
32102-022100-100-RS	ATX power cable
32200-026500-RS	RS-232 and RS-422/485 cable